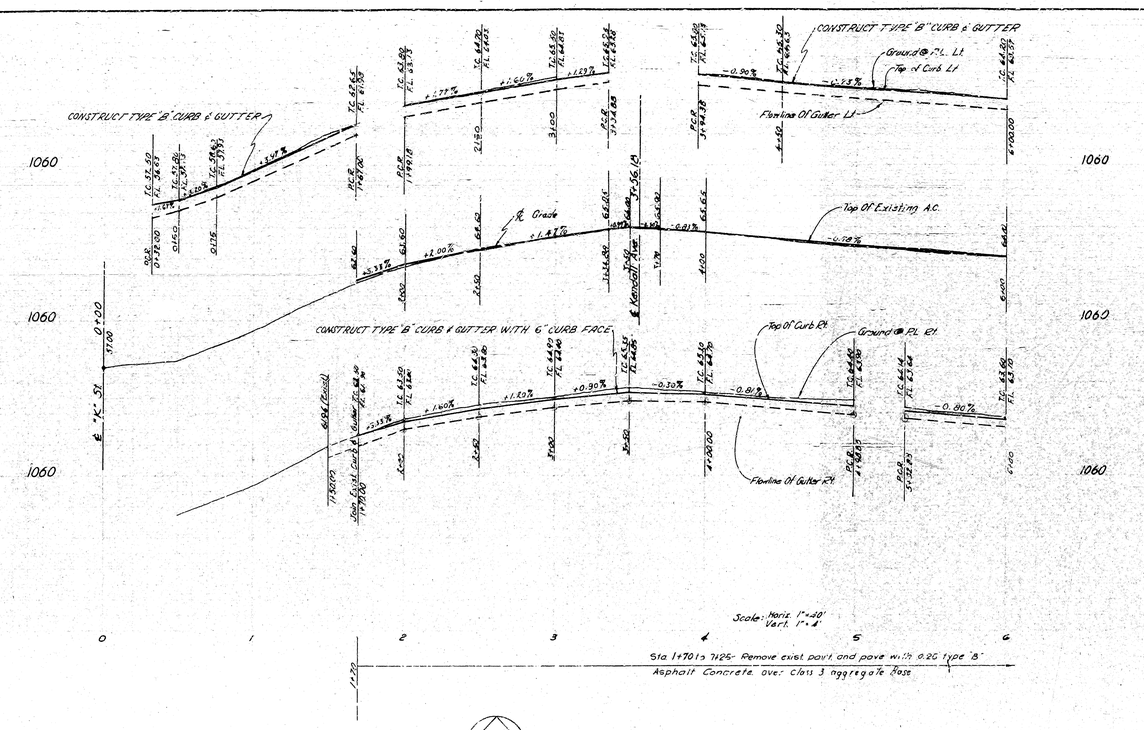

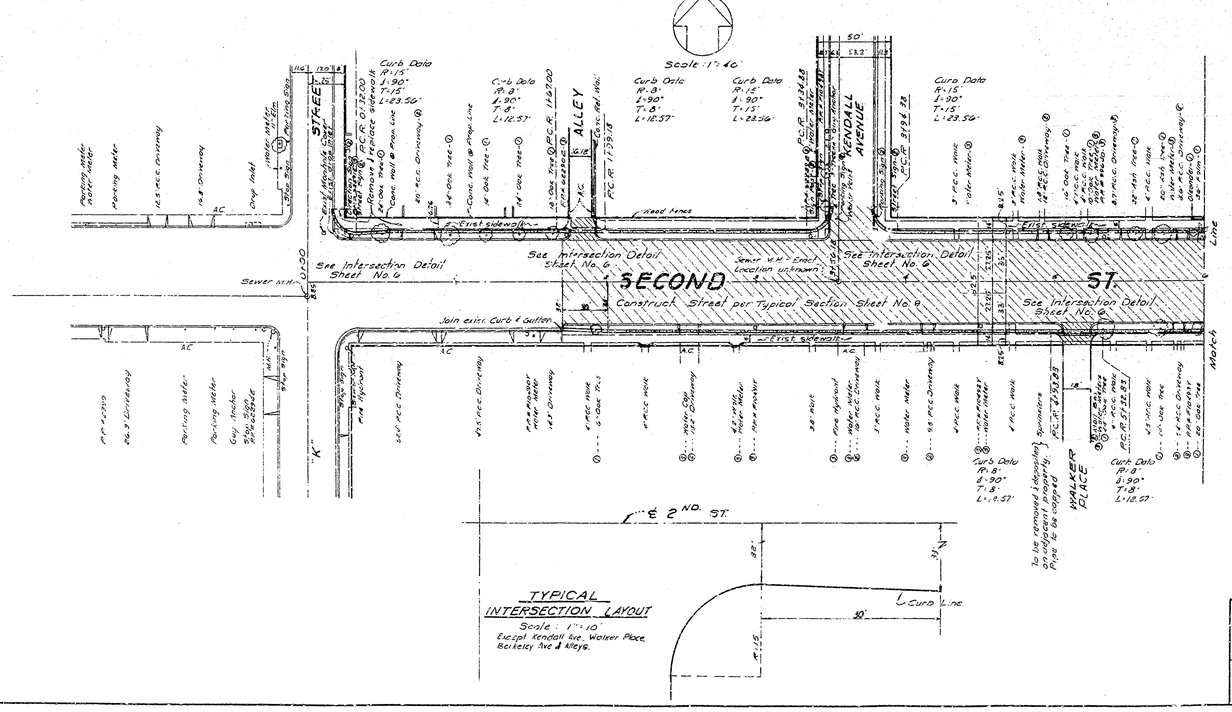

GENERAL NOTES

1. All work shall be done in accordance with these Plans, Special Provisions No. 3009, and the applicable provisions of the Standard Specifications, State of California, Department of Public Work Division of Highways, dated January, 1960.
2. Curb & Gutter, Cross Gutter, Sidewalks and Driveways shall be constructed in accordance with Standard Dwg. No. 2321, Dept. of Engineering, City of San Bernardino.
3. Removal of obstructions:
   - (1) - to be removed under this contract
   - (2) - to be removed and reconstructed or relocated under this contract
   - (3) - to be removed, reconstructed or relocated by other
4. All manhole Frames and covers shall be Alhambra Foundry # A-1531 or approved equal, unless otherwise shown on Plans.
5. Street Signs and standards shall be removed and relocated as directed by the Engineer. Footings equal to the original installation shall be constructed with Class "B" concrete.
6. BENCH MARKS:
   - a.) (City B.M.) Screw in curb rel. @ N.W. Cor. 2ND. & "K" St. Elev. 1056.90
   - b.) "W" nail * in top of east curb on "J" St., 100'± North of 2ND. St. Elev. 1063.35
   - c.) "W" nail * in top of east curb on "I" St., 100'± North of 2ND. St. Elev. 1059.04
   - d.) "W" nail * in top of east curb on "H" St., 100'± North of 2ND. St. Elev. 1054.18
   - e.) "W" nail * in top of east curb on "G" St., 100'± North of 2ND. St. Elev. 1046.40
   - f.) "W" nail * in top of east curb on "F" St., 100'± North of 2ND. St. Elev. 1043.09
   - g.) Conc. nail in Bank Parking Lot Curb, 45' west of Back and South Prop. Line ℄ of 2ND. St. @ S.W. Cor. of 2ND. & "E" St., Elev. 1032.41
   - h.) Screw in cfr. of curb rel. @ S.E. Cor. of 2ND. & Stoddard St., Elev. 1033.79

   * "W" nail - concrete nail with a "W" inscribed in head.
7. Adjust all sewer manholes to grade after completion of paving.
8. NR - Not to be removed

BETWEEN 70 TO 90 OF THE TREES SHOWN ON THE PLANS HAVE BEEN REMOVED. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXACT NUMBER & LOCATION OF THE TREES THAT HAVE BEEN REMOVED.

CAMPBELL & MILLER Land Surveying & Civil Engineering 356 Court St., San Bernardino, Calif. Don B. Miller R.E. 8750	APPROVED May 1, 1962 CITY ENGINEER REGISTERED CIVIL ENGINEER NO. 1850 DRAWING NO. 3009 · DRAWN BY E.L. SHEET OF 15 SHEETS · CHECKED BY D.W. APPROVED TKR	DEPARTMENT OF ENGINEERING CITY OF SAN BERNARDINO 2ND STREET IMPROVEMENT PLANS "K" STREET TO STODDARD AVENUE PLAN & PROFILE STA. 0+00 TO STA. 7 SHEET 1 OF 15 SHEETS

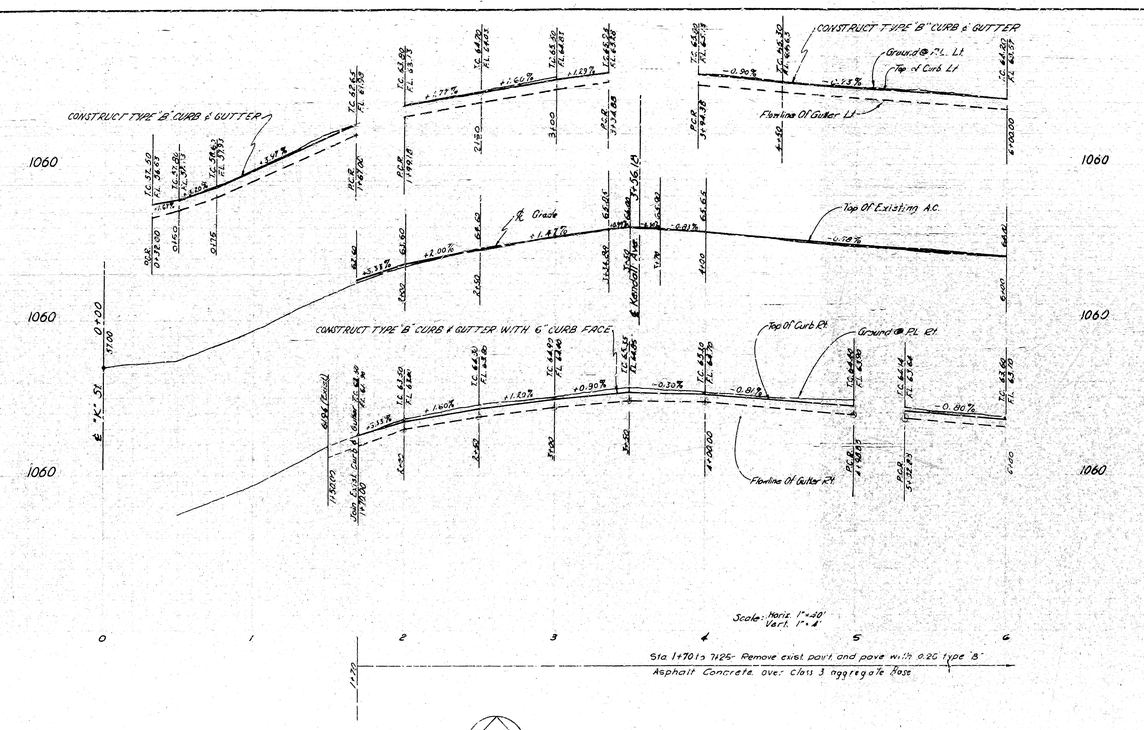

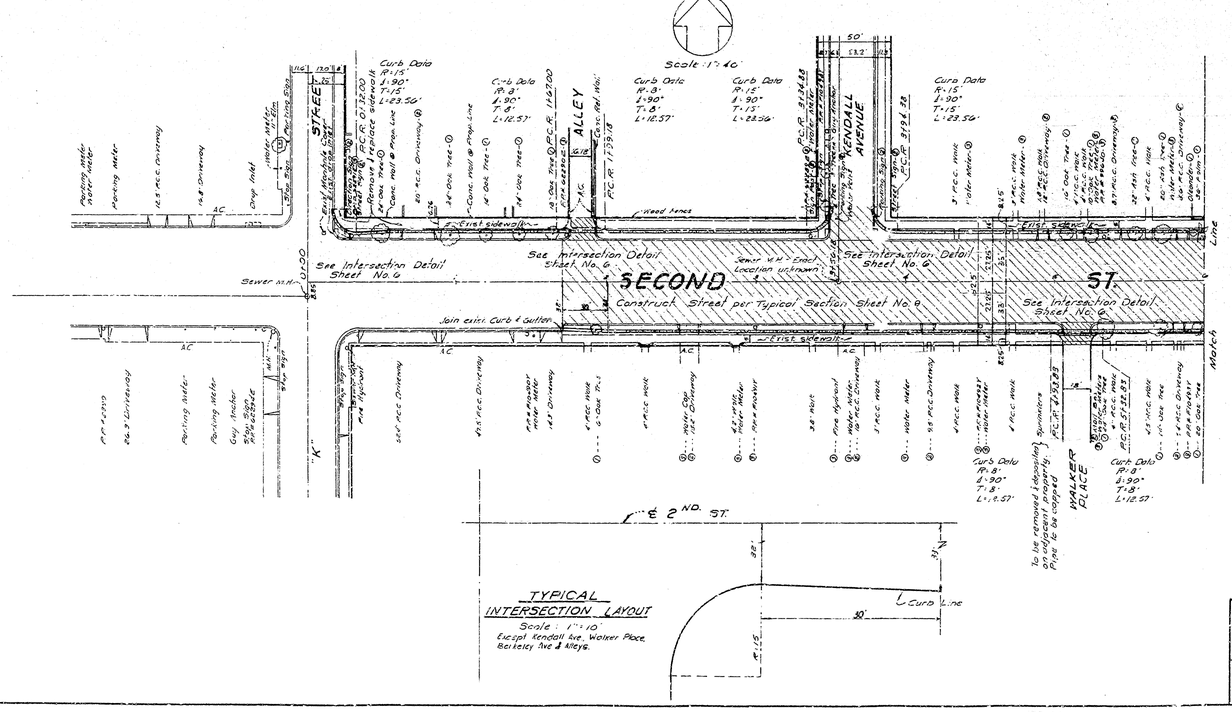

GENERAL NOTES

1. All work shall be done in accordance with these Plans, Special Provisions No. 3009, and the applicable provisions of the Standard Specifications, State of California, Department of Public Work Division of Highways, dated January, 1960.
2. Curb & Gutter, Cross Gutter, Sidewalks and Driveways shall be constructed in accordance with Standard Dwg. No. 2321, Dept. of Engineering, City of San Bernardino.
3. Removal of obstructions:
   - (1) - to be removed under this contract
   - (2) - to be removed and reconstructed or relocated under this contract
   - (3) - to be removed, reconstructed or relocated by other
4. All manhole Frames and covers shall be Alhambra Foundry # A-1531 or approved equal, unless otherwise shown on Plans.
5. Street Signs and standards shall be removed and relocated as directed by the Engineer. Footings equal to the original installation shall be constructed with Class "B" concrete.
6. BENCH MARKS:
   - a.) (City B.M.) Screw in curb rel. @ N.W. Cor. 2ND. & "K" St. Elev. 1056.90
   - b.) "W" nail * in top of east curb on "J" St., 100'± North of 2ND. St. Elev. 1063.35
   - c.) "W" nail * in top of east curb on "I" St., 100'± North of 2ND. St. Elev. 1059.04
   - d.) "W" nail * in top of east curb on "H" St., 100'± North of 2ND. St. Elev. 1054.18
   - e.) "W" nail * in top of east curb on "G" St., 100'± North of 2ND. St. Elev. 1046.40
   - f.) "W" nail * in top of east curb on "F" St., 100'± North of 2ND. St. Elev. 1043.09
   - g.) Conc. nail in Bank Parking Lot Curb, 45' west of Back and South Prop. Line ℄ of 2ND. St. @ S.W. Cor. of 2ND. & "E" St., Elev. 1032.41
   - h.) Screw in cfr. of curb rel. @ S.E. Cor. of 2ND. & Stoddard St., Elev. 1033.79

   * "W" nail - concrete nail with a "W" inscribed in head.
7. Adjust all sewer manholes to grade after completion of paving.
8. NR - Not to be removed

BETWEEN 70 TO 90 OF THE TREES SHOWN ON THE PLANS HAVE BEEN REMOVED. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXACT NUMBER & LOCATION OF THE TREES THAT HAVE BEEN REMOVED.

CAMPBELL & MILLER Land Surveying & Civil Engineering 356 Court St., San Bernardino, Calif. Don B. Miller R.E. 8750	APPROVED May 1, 1962 CITY ENGINEER REGISTERED CIVIL ENGINEER NO. 1850 DRAWING NO. 3009 · DRAWN BY E.L. SHEET OF 15 SHEETS · CHECKED BY D.W. APPROVED TKR	DEPARTMENT OF ENGINEERING CITY OF SAN BERNARDINO 2ND STREET IMPROVEMENT PLANS "K" STREET TO STODDARD AVENUE PLAN & PROFILE STA. 0+00 TO STA. 7 SHEET 1 OF 15 SHEETS