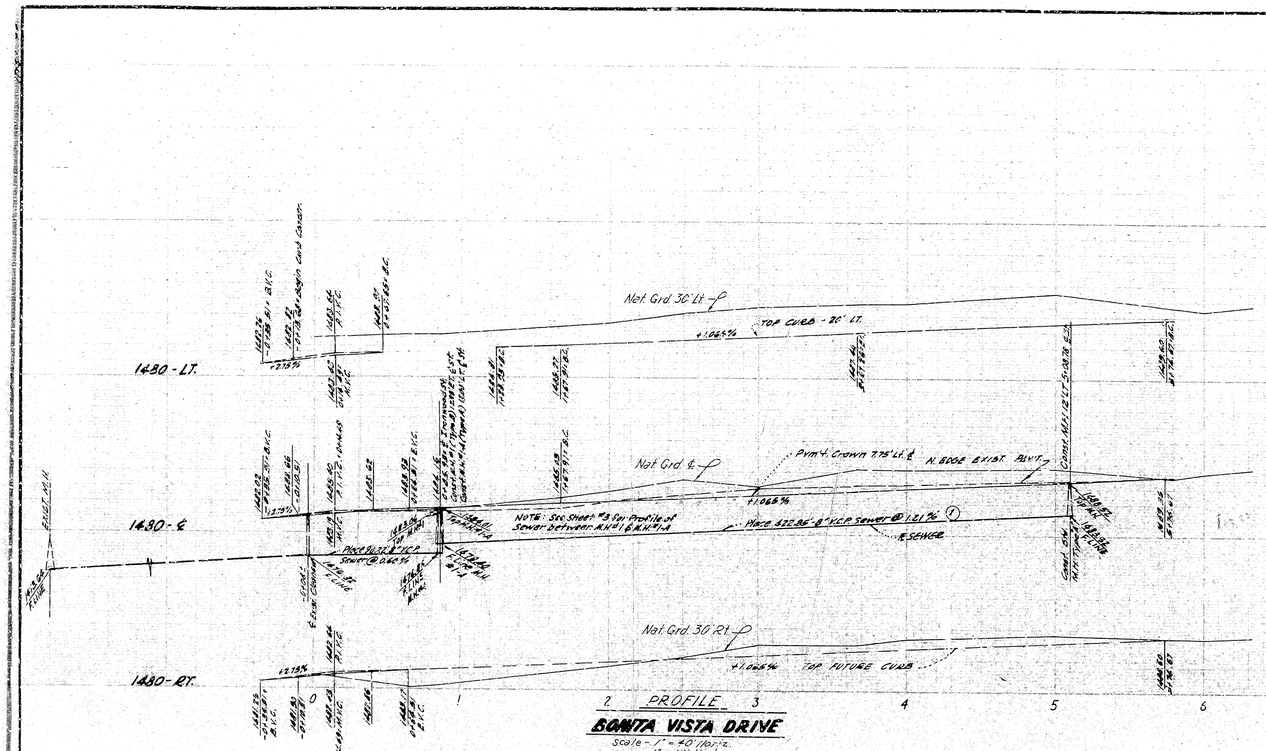


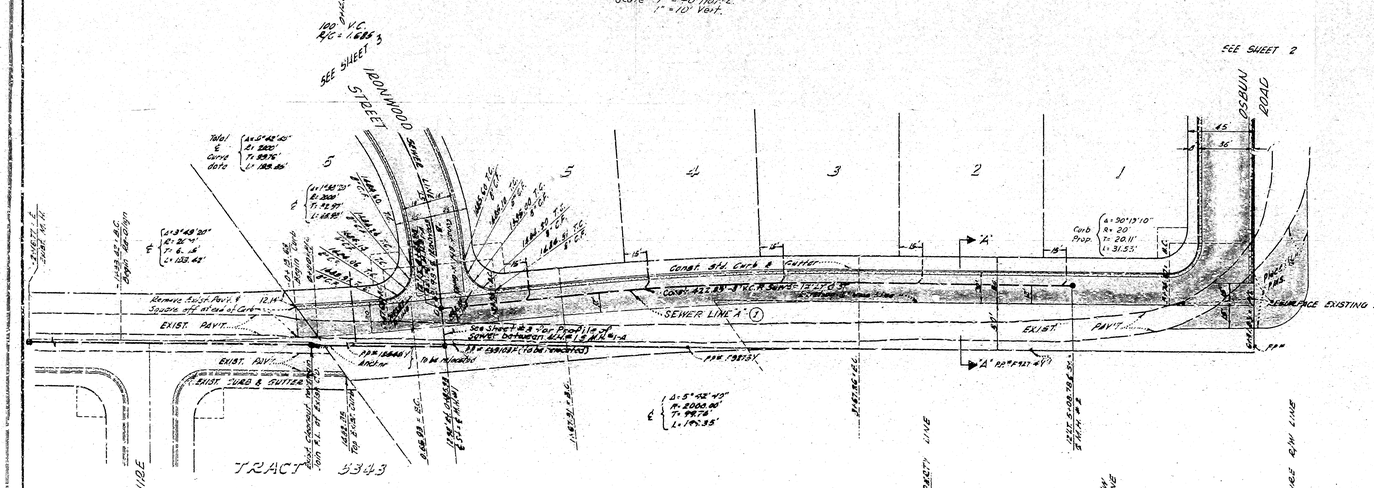


NOTES:

1. Manhole frames & covers to be constructed by Sewer Contractor 6" below off-set grade shown, and upon completion of paving the Paving Contractor shall adjust manhole frames and covers to said official grade.
2. All laterals shall be 6" pipe and extended 2' beyond property line, at a 2% min. grade. (See Note #8)
3. Exact location of sewer laterals to be determined in the field.
4. Sewer laterals to be constructed of either "Wedge Lock", "Speed-Seal", "Ceramic Weld", or "Bell Seal" clay pipe or asbestos cement pipe. Sewer mains shall be constructed of either "Wedge Lock" "Speed-Seal" or "Bell Seal" clay pipe.
5. Manhole steps shall not be required. Manhole frames and covers shall be Alhambra Foundry No. A-1180, "Lillian Kinger" or approved equal.
6. All work included on these plans shall be done in conformity with applicable provisions of Specification No. 2271 & Std. Drawings No. 192" on file in office of City Engineer.
7. A permit shall be required from the S.B.C.F.C.D. prior to construction within S.B.C.F.C.D. Right of Way.
8. Place 2½" Plant-Mix Pavement in all streets as shown.
9. BENCH MARK: Spike in P.P. # 103 B.C.L.S. 30' North and 30' West of Del Rosa & Oxford Lane per Tract 5343 ELEVATION: 1423.87 M.S.L.

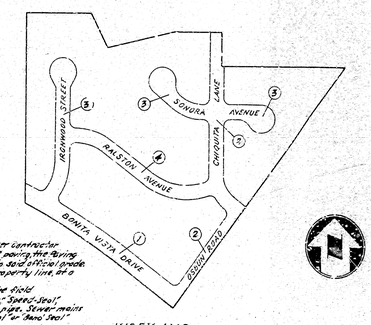


INDEX MAP
SCALE - 1" = 200'

| No. | REVISION | DESCRIPTION | APPROVED | DATE |
|---|---|---|---|---|
| 1 | Change location of Sewer Line 'A' Elev. 24" C.M.P. into F.C.D. Channel | A.G. | AJS | 9/17/62 |

NT OF ENGINEERING
AN BERNARDINO

TRACT NO. 5601

Registered Engineer

ARTHUR J. SULLIVAN & ASSOC.
August 29 62
Plotted to Mat
Drawing
CD / 11
10.486
2756

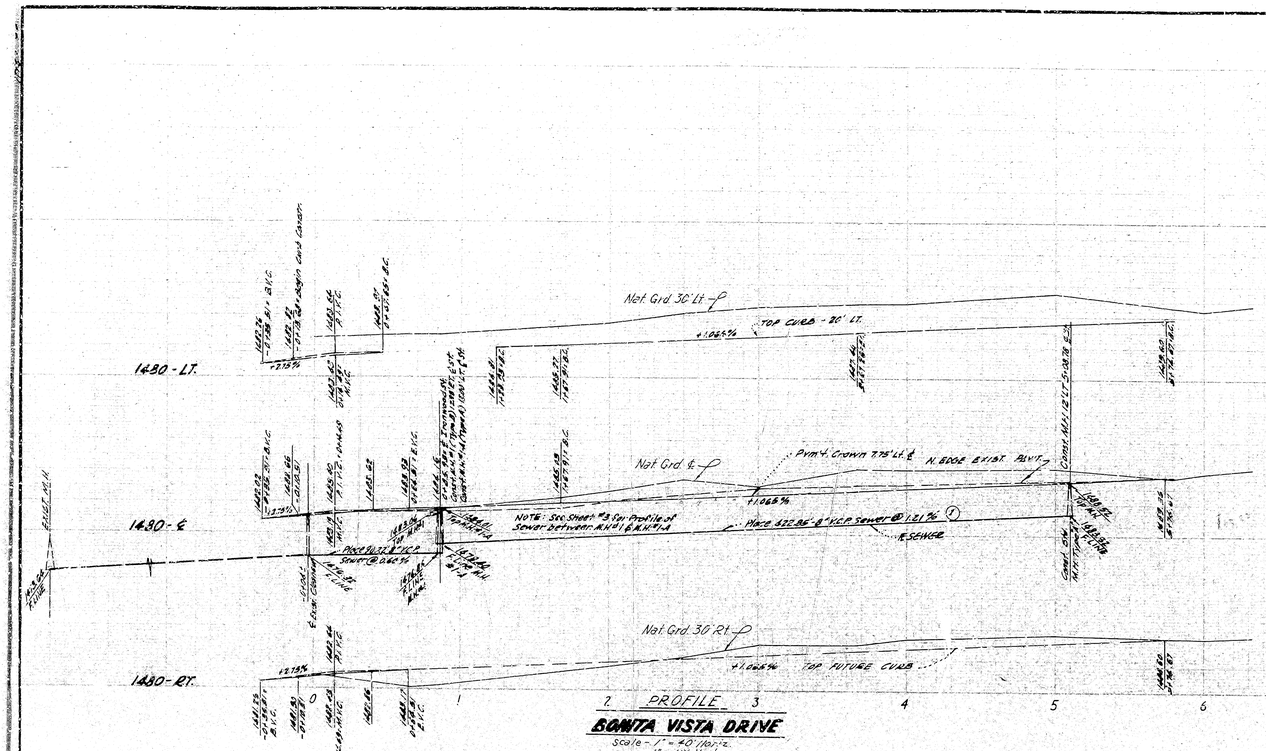


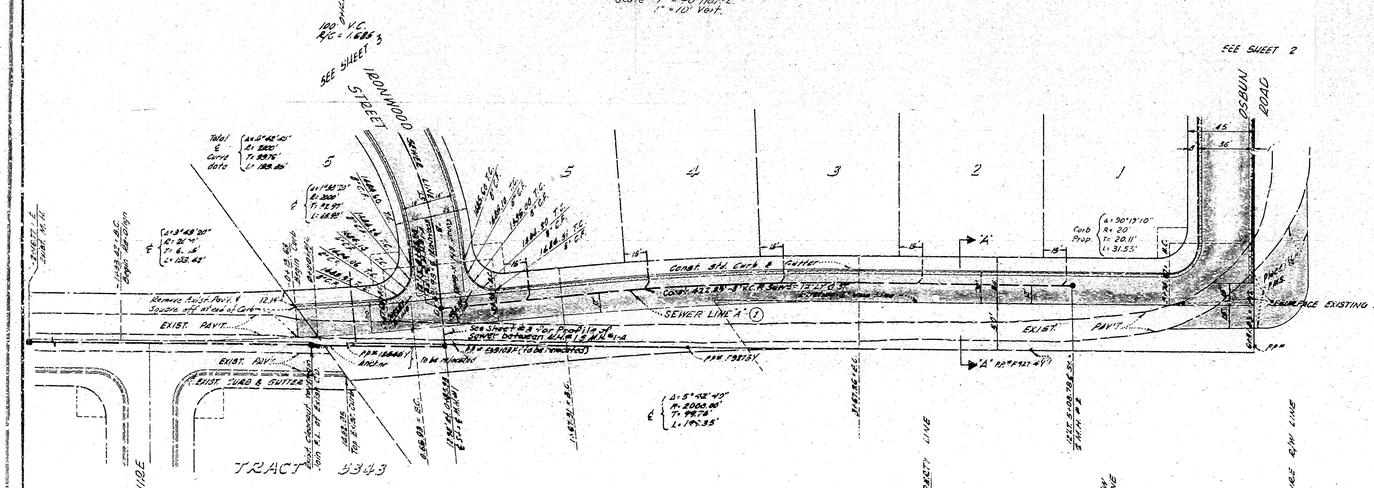


NOTES:

1. Manhole frames & covers to be constructed by Sewer Contractor 6" below off-set grade shown, and upon completion of paving the Paving Contractor shall adjust manhole frames and covers to said official grade.
2. All laterals shall be 6" pipe and extended 2' beyond property line, at a 2% min. grade. (See Note #8)
3. Exact location of sewer laterals to be determined in the field.
4. Sewer laterals to be constructed of either "Wedge Lock", "Speed-Seal", "Ceramic Weld", or "Bell Seal" clay pipe or asbestos cement pipe. Sewer mains shall be constructed of either "Wedge Lock" "Speed-Seal" or "Bell Seal" clay pipe.
5. Manhole steps shall not be required. Manhole frames and covers shall be Alhambra Foundry No. A-1180, "Lillian Kinger" or approved equal.
6. All work included on these plans shall be done in conformity with applicable provisions of Specification No. 2271 & Std. Drawings No. 192" on file in office of City Engineer.
7. A permit shall be required from the S.B.C.F.C.D. prior to construction within S.B.C.F.C.D. Right of Way.
8. Place 2½" Plant-Mix Pavement in all streets as shown.
9. BENCH MARK: Spike in P.P. # 103 B.C.L.S. 30' North and 30' West of Del Rosa & Oxford Lane per Tract 5343 ELEVATION: 1423.87 M.S.L.

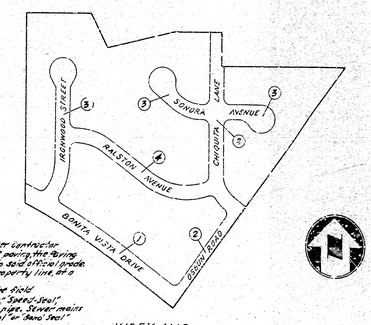


INDEX MAP
SCALE - 1" = 200'

| No. | REVISION | DESCRIPTION | APPROVED | DATE |
|---|---|---|---|---|
| 1 | Change location of Sewer Line 'A' Elev. 24" C.M.P. into F.C.D. Channel | A.G. | AJS | 9/17/62 |

NT OF ENGINEERING
AN BERNARDINO

TRACT NO. 5601

Registered Engineer

ARTHUR J. SULLIVAN & ASSOC.
August 29 62
Plotted to Mat
Drawing
CD / 11
10.486
2756