


NOTES

1. All work shown on these plans shall be done in conformity with applicable provisions of specifications No. 271 of the City of San Bernardino.
2. 4" Wyes with connecting sewer to be constructed - shown on plan by a T.
3. All ~~existing~~ house connections shall be constructed on an upward grade of 2 percent from main sewer and shall extend from the main sewer to property line.
4. All house connections are approximate and exact locations shall be determined in the field.
5. Manhole frames and covers to be constructed by sewer contractor & below official grade shown to and upon completion of paving, the paving contractor shall adjust manhole frames and covers to 2" final grades.
6. Sections of curb, gutters and sidewalks are as per City of San Bernardino, Department of Engineering, Std. Drawings No. 2821 A & B.
7. The existence and location of any underground utility pipes or structures shown on these plans are obtained by a search of available records to the best of our knowledge. There are no existing utilities except as shown.
8. The contractor is required to take all precautionary measures to protect the utility lines and any other lines not of record or not shown on these drawings.
9. Sewer laterals to be constructed of either "Wedge Lock" "Speed Seal" or "Band Seal" clay pipe or asbestos cement pipe. Sewer mains shall be constructed of either of the above named pipe.
10. Manhole streets shall not be required. Manhole frames and covers shall be Alhambra Foundry, Lb. 4-1800 "Silent Knight" or approved equal.
11. All underground spring water construction must be obtained by underground system. No open drainage of spring water permitted on road. It shall be required to determine the location of any spring water by test pits. If any spring water is found, the existing surface to be replaced with a concrete base. The concrete shall be placed to support the indicated surfacing and/or the surfacing thickness shall be increased.

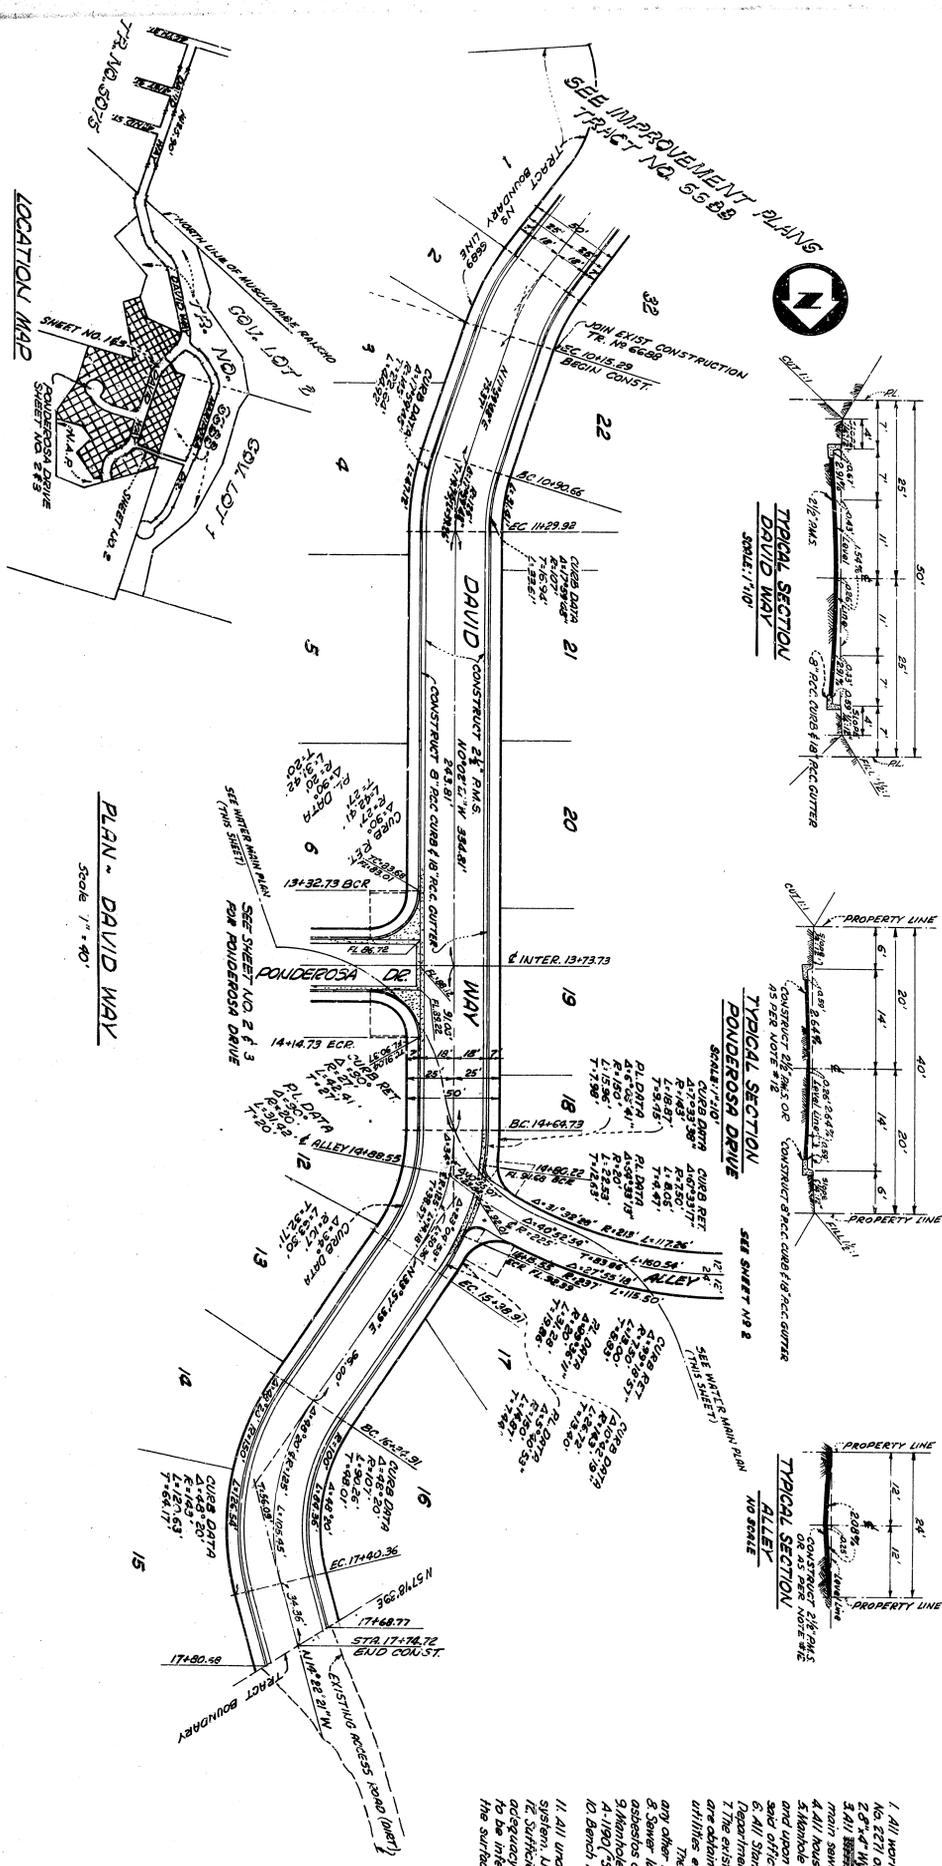

PLAN - DAVID WAY
Scale 1" = 40'

<p style="text-align: center;">DEPARTMENT OF ENGINEERING CITY OF SAN BERNARDINO TRACT NO. 6689 STREET IMPROVEMENT PLANS & SEWER PLANS</p>	<p style="text-align: right;">SUBMITTED BY: <i>[Signature]</i> DESIGNED BY: <i>[Signature]</i> CHECKED BY: <i>[Signature]</i> DATE: 11/15/53 SHEET NO. 1 OF 1</p>
---	---

LOCATION MAP
Scale 1" = 40'

SEE IMPROVEMENT PLANS TRACT NO. 5588

SEE SHEET NO. 2 & 3

SEE SHEET NO. 4

SEE SHEET NO. 5

SEE SHEET NO. 6

SEE SHEET NO. 7

SEE SHEET NO. 8

SEE SHEET NO. 9

SEE SHEET NO. 10

SEE SHEET NO. 11

SEE SHEET NO. 12

SEE SHEET NO. 13

SEE SHEET NO. 14

SEE SHEET NO. 15

SEE SHEET NO. 16

SEE SHEET NO. 17



SEE SHEET NO. 18

SEE SHEET NO. 19

SEE SHEET NO. 20


SEE SHEET NO. 21

SEE SHEET NO. 22

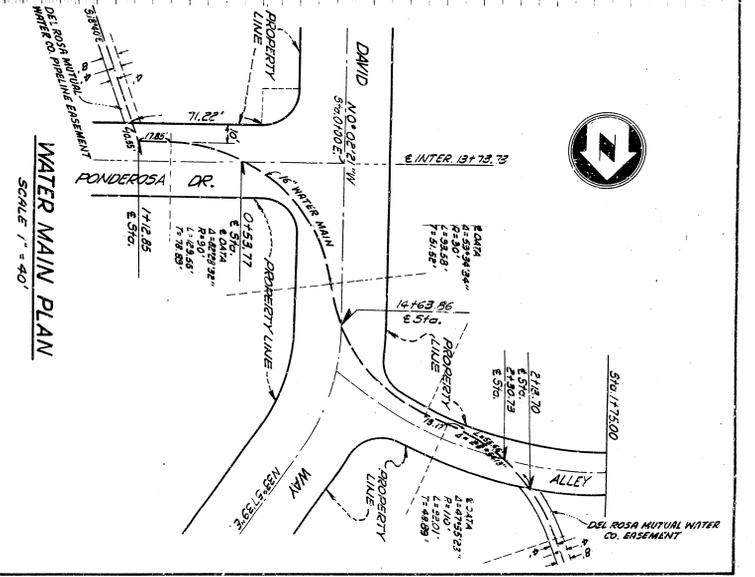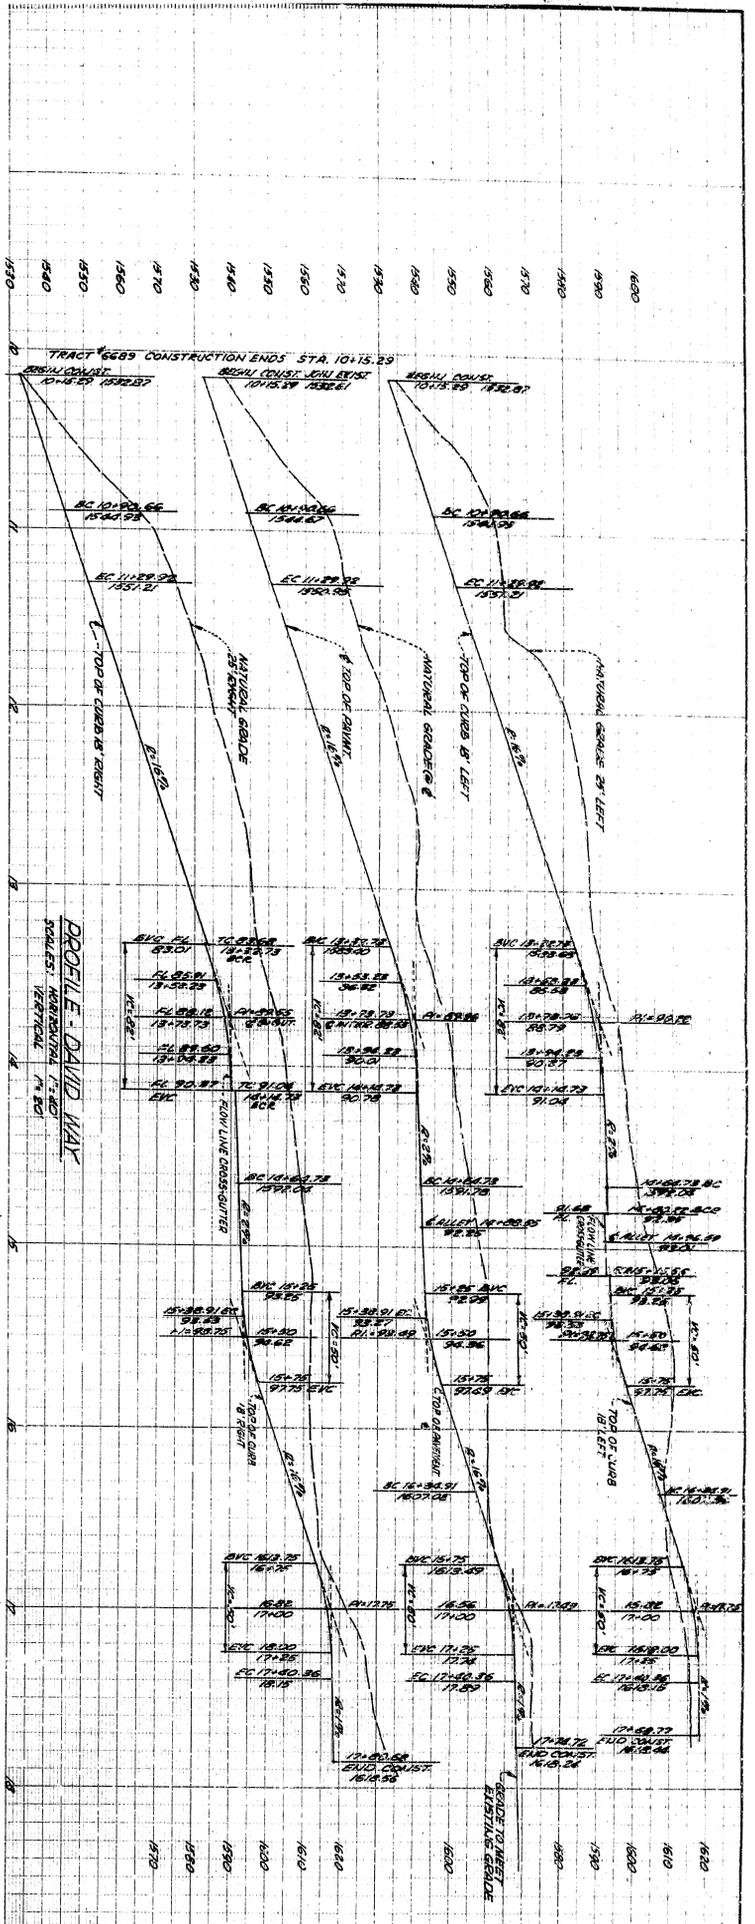

NOTES

1. All work shown on these plans shall be done in conformity with applicable provisions of specifications No. 271 of the City of San Bernardino.
2. 4" Wyes with connecting sewer to be constructed - shown on plan by a T.
3. All ~~existing~~ house connections shall be constructed on an upward grade of 2 percent from main sewer and shall extend from the main sewer to property line.
4. All house connections are approximate and exact locations shall be determined in the field.
5. Manhole frames and covers to be constructed by sewer contractor & below official grade shown to and upon completion of paving, the paving contractor shall adjust manhole frames and covers to 2" All final grades.
6. Sections of curb, gutter and sidewalks are as per City of San Bernardino, Department of Engineering, Std. Drawings No. 2821 A & B.
7. The existence and location of any underground utility pipes or structures shown on these plans are obtained by a search of available records to the best of our knowledge. There are no existing utilities except as shown.
8. The contractor is required to take all precautionary measures to protect the utility lines and any other lines not of record or not shown on these drawings.
9. Sewer laterals to be constructed of either "Wedge Lock" "Speed Seal" or "Band Seal" clay pipe or asbestos cement pipe. Sewer mains shall be constructed of either of the above named pipe.
10. Manhole streets shall not be required. Manhole frames and covers shall be Alhambra Foundry, Lb. 4-1800 "Silent Knight" or approved equal.
11. All underground spring water construction must be obtained by underground system. No open drainage of spring water permitted on road. It shall be required to determine the location of the spring water and the depth of the water table. The existing surface shall be maintained. The indicated base material shall be placed to support the indicated surfacing and/or the surfacing thickness shall be increased.

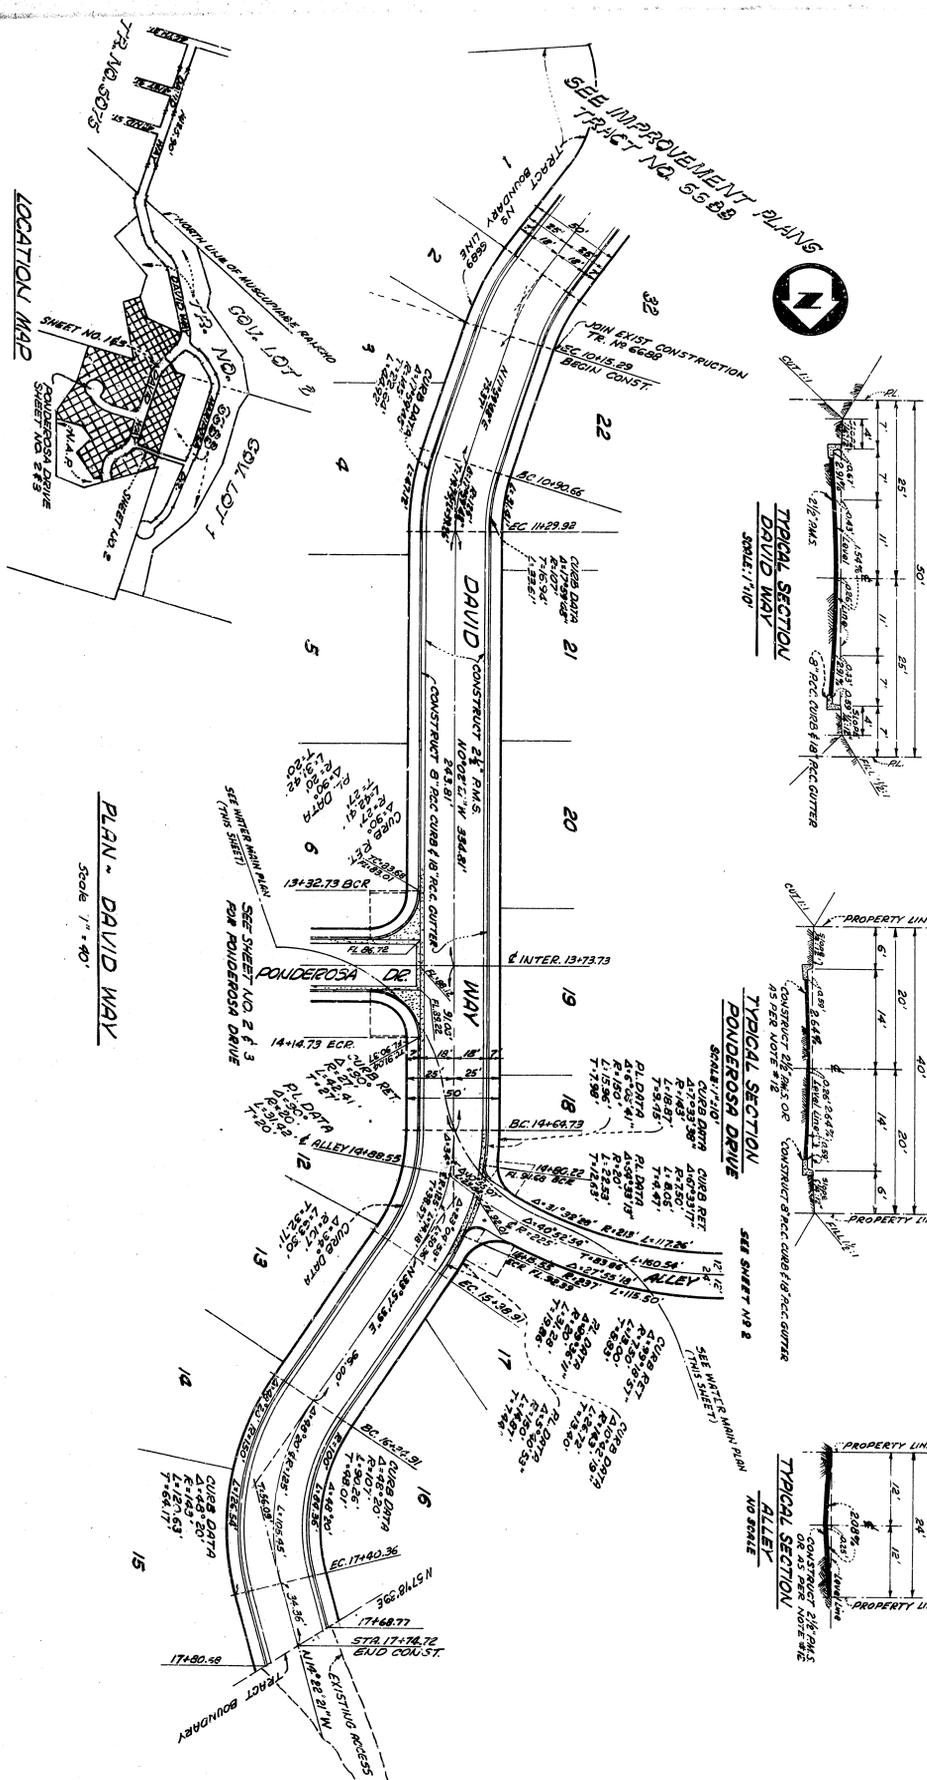

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARDINO
TRACT NO. 6689
STREET IMPROVEMENT PLANS
& SEWER PLANS

SUBMITTED BY: [Signature]
DESIGNED BY: [Signature]
CHECKED BY: [Signature]
DATE: [Date]

REFERENCE: [Reference]
SCALE: 1" = 40'

NO. NO. 3005
SHEET 3