


Note:
Sewer lateral Sig. 2132 to 3131 to be concrete encased per Section A-A.

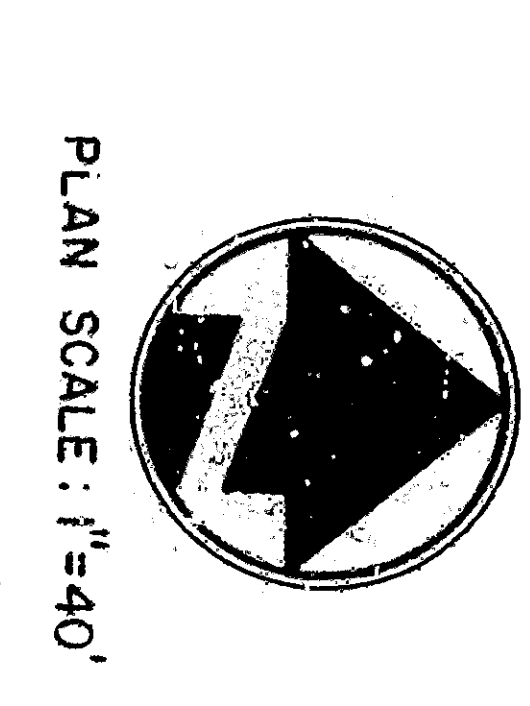

- Notes:
- All work on these plans shall be done in conformity with applicable provisions of specifications No. 2271, revised October 1965, of the City of San Bernardino, and Standard Drawings No. 2321, on file in the office of the City Engineer.
 - Manhole Frames and covers to be constructed by Sewer Contractor to existing manholes.
 - The existence and location of any underground utility pipes or structures shown on these plans are obtained by a search of available records. To the best of our knowledge there are no existing utilities except as shown.
 - The Contractor is required to take due precautionary measures to protect the utility lines and any other lines not of record or not shown on these drawings.
 - Sewer laterals to be constructed of either "Wedge-Lock", "Speed-Shield", or "Band-Shield" clay pipe or asbestos cement pipe. Sewer mains shall be constructed of either "Wedge-Lock", "Speed-Shield", or "Band-Shield" clay pipe.
 - Manhole steps shall not be required. Manhole Frames and Covers shall be Aluminum Foundry No. A-1170, or approved equal.
 - Channel cover and frame to be set to proposed finished grade.

DEPARTMENT OF ENGINEERING	
CITY OF SAN BERNARDINO	
SEWER PLAN & PROFILE	
ORANGE SHOW ROAD	
FROM 'E' STREET EAST 260'±	
DESIGNED BY	REFERENCE:
5-2-7	19-2-7
19-2-7	19-2-7
3613	3613
CHECKED BY	OF SHEET
1	1