


GENERAL NOTES

1. All work indicated on this plan shall be done in conformity with applicable provisions of Standard Specifications for the City of San Bernardino, Drawing No. 2311 on file in the office of the City Engineer.
2. All sewer connection sewers shall be constructed on an existing grade of 1.00 per cent from the main sewer and shall be 3" x 4" pipe with 1/2" thick concrete cover.
3. Sewer to be constructed on above plan shall be 12" diameter.
4. All these connections are approximate and exact locations are to be determined in the field.
5. Locations of underground utilities as shown on this plan are not to be assumed as being exact or complete and the City assumes no responsibility for errors or omissions in showing such locations. The contractor should verify or ascertain the location of all underground utilities and he must assume all liability for damages caused by his operations.
6. Manholes are to be constructed below finished ground level.
7. Manhole rings shall not be required. Manhole frames and covers shall be Alameda County No. 4-1190 (Steel Ring) or approved equal.
8. Sewer laterals shall be constructed of either "Wedge Lead", "Speed Seal", "Bond Seal" or "Alameda County" Pipe or Cast Iron Pipe or Alameda County Pipe.
9. Sewer lines shall be constructed of either "Wedge Lead", "Speed Seal" or "Bond Seal" (City Pipe).
10. No more than 2500 (two and a half) feet of trench shall be open at one time. Open trenches shall be covered as they are excavated. They shall not be left open, covered with a temporary patch. They shall be paved with a temporary patch.



PLAN
Scale 1" = 40'

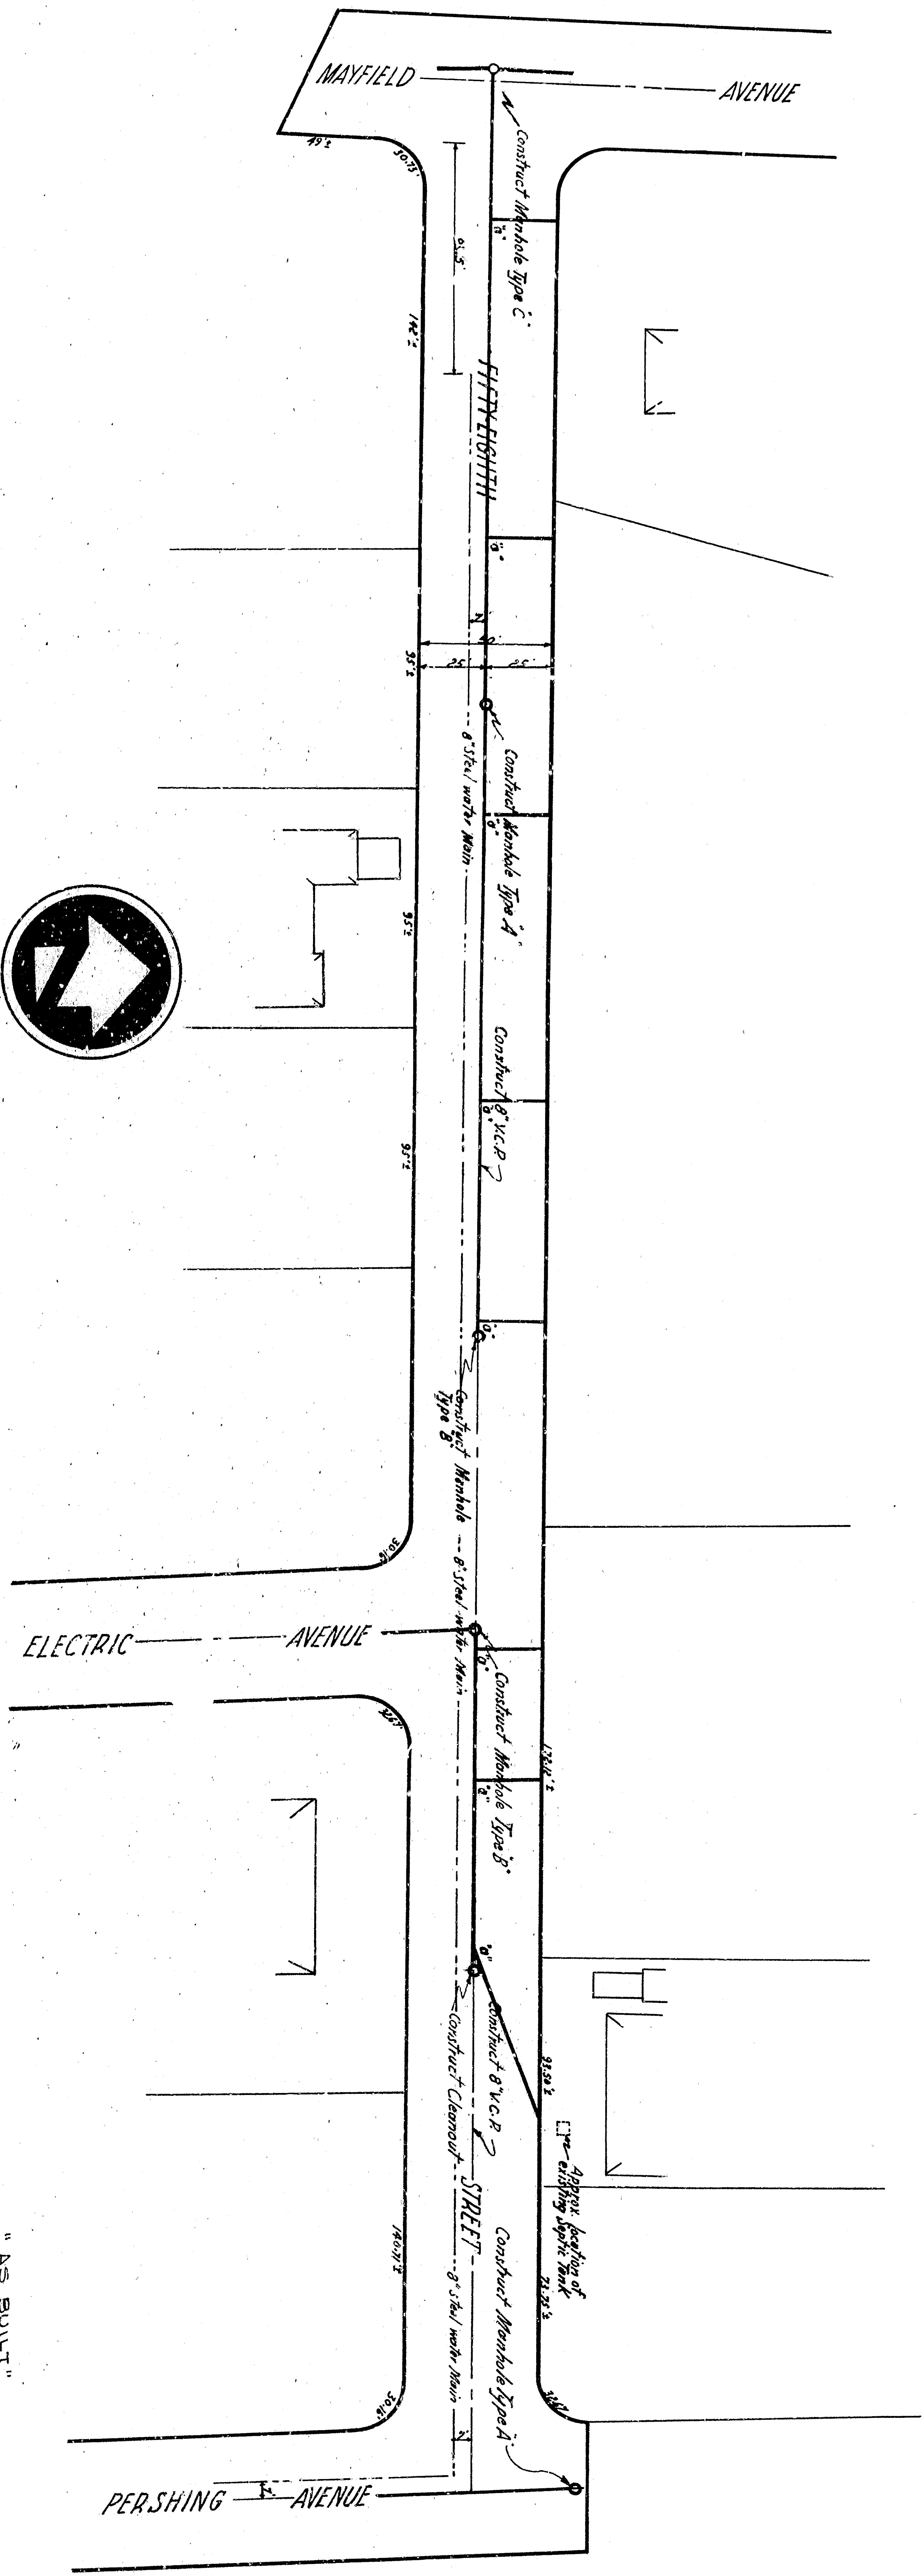

APPROVED	DATE	1962
CITY ENGINEER		
REGISTERED NO.	NO.	26327
DRAWING NO.	DRAWN BY	
3111	T.C.G.	
SHEET 2	OF	RECOMMENDED
4	SHEETS	T.C.G.
DEPARTMENT OF ENGINEERING		
CITY OF SAN BERNARDINO		
FIFTY-EIGHT STREET		
Between Mayfield Avenue and Pershing Avenue		

