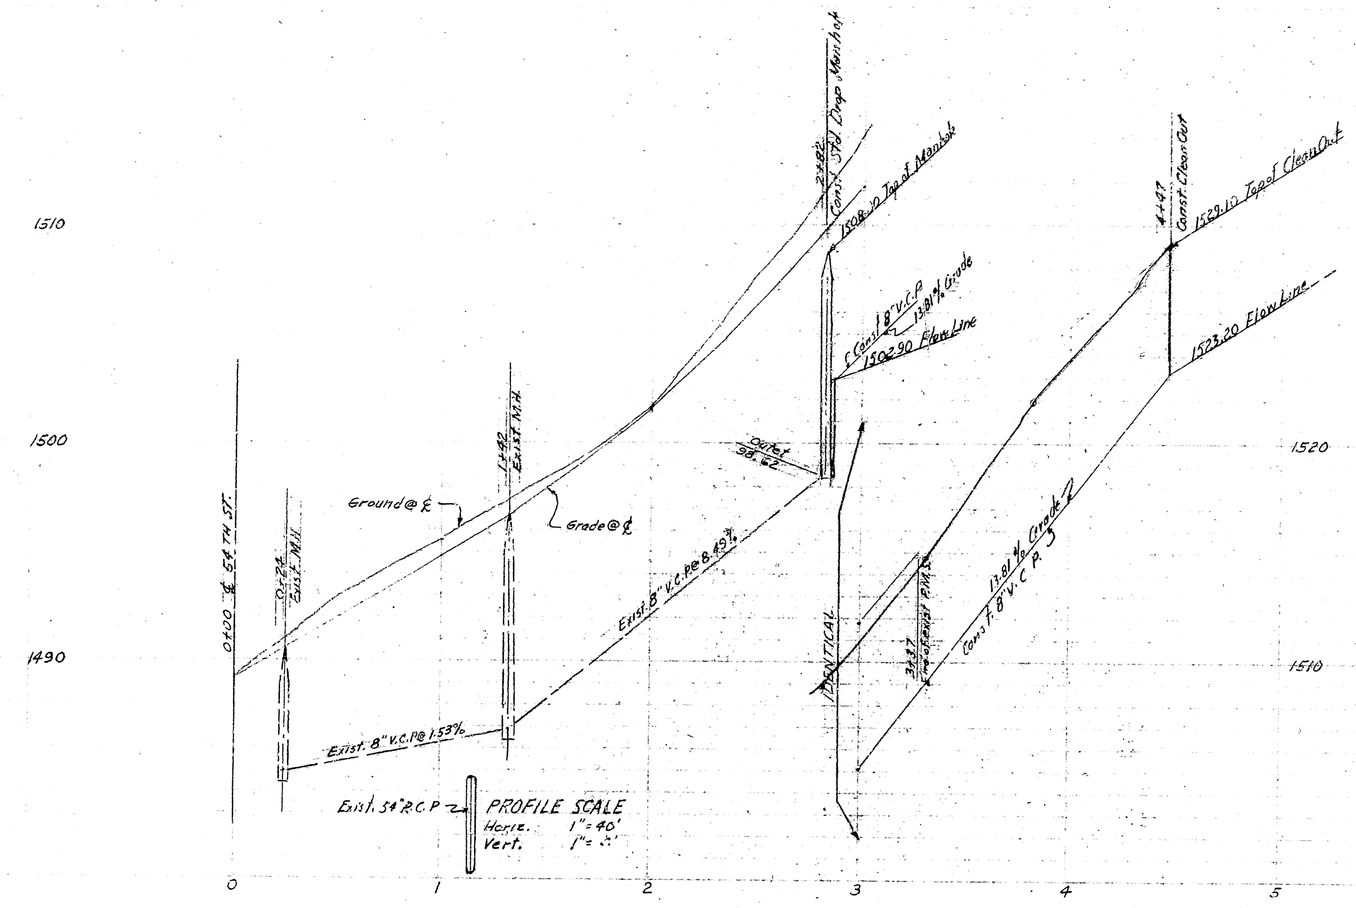

Bench Mark:
North end of conc. curb, west side @ Sepulveda and 54TH ST., City of San Bernardino. B.M. #36
Elev. 1488.34 M.S.L.

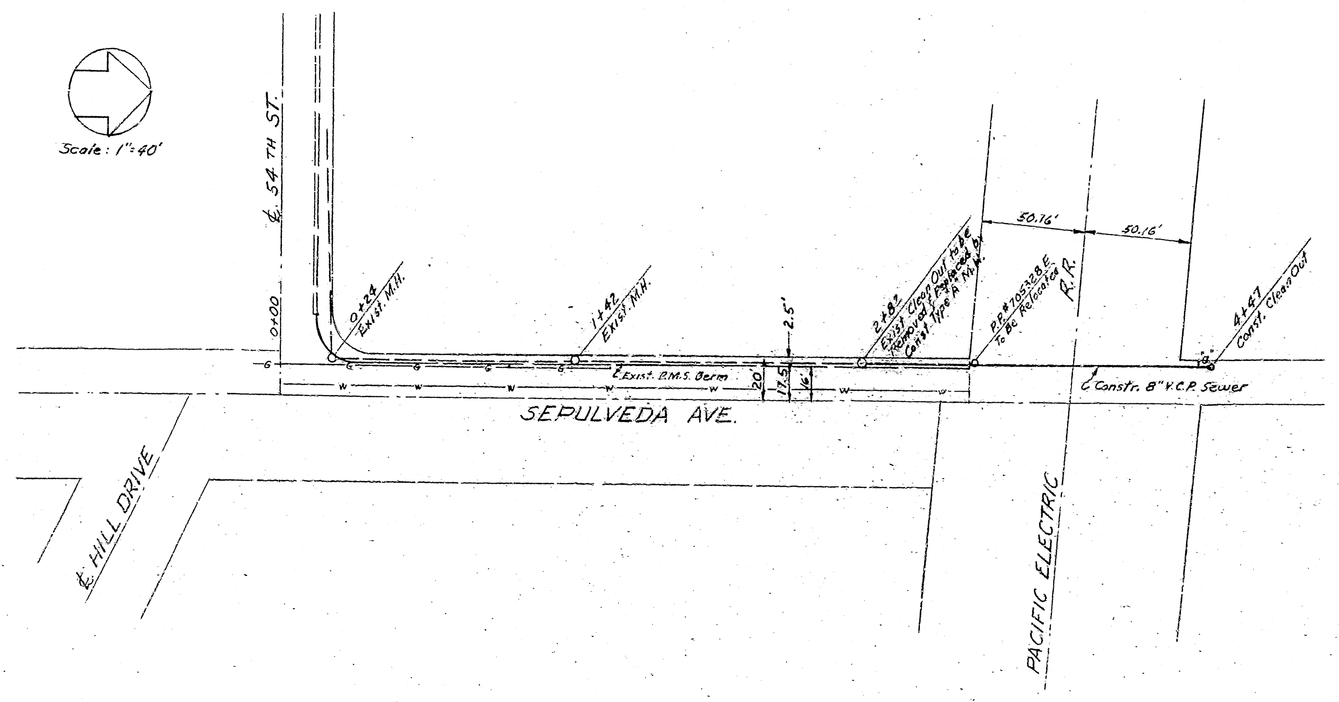

GENERAL NOTES

1. All work embodied on these Plans shall be done in conformity with applicable provisions of Standard Specifications No 2271 and Standard Drawing No 2321 on file in the Office of the City Engineer.
2. All house connection sewers shall be constructed on an upward grade of Two per cent from the Main.
3. 6"X 4" Wyes with 4" Vitrified Clay Pipe connecting Sewer to be constructed are shown on Plan thus: Y
4. All House connections are approximate and exact locations are to be determined in the Field.
5. Location of underground utilities as shown on these Plans are not to be assumed as being exact or complete and the City assumes no responsibility for errors or omissions in showing such locations. The Contractor should verify or ascertain the location of all underground utilities and he must assume all liability for damages caused by his operation.
6. Manhole tops to be constructed 6" below Finished Pavement Grade
7. Manhole steps shall not be required. Manhole frames and covers shall be Alhambra Foundry No. A-1190 (Silent Knight) or approved equal.
8. Sewer laterals shall be constructed of Fernco "Wedge Lock" "Speed Seal" "Band Seal" or Ceramic Weld" Vitrified Clay Pipe or Cast Iron or Asbestos Cement Pipe.

NOT CONSTRUCTED 1963

REFERENCE DRAWINGS

Improvement Drwgs - Tract No 6912 File No 70-240
DWG. No 3061 SH. 1 & 3

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARDINO

SEPULVEDA STREET SEWER IMPROVEMENT

From a point 282± Ft. north of 54TH Street to a point 487± Ft. north of 54TH Street.

SUBMITTED BY _____
APPROVED 1-6- 19 64
CITY ENGINEER
R.C.E. No 13653

REFERENCE
DRAWN BY B. Stone
CHECKED BY

DRAWING 320
SHEET OF SHEETS

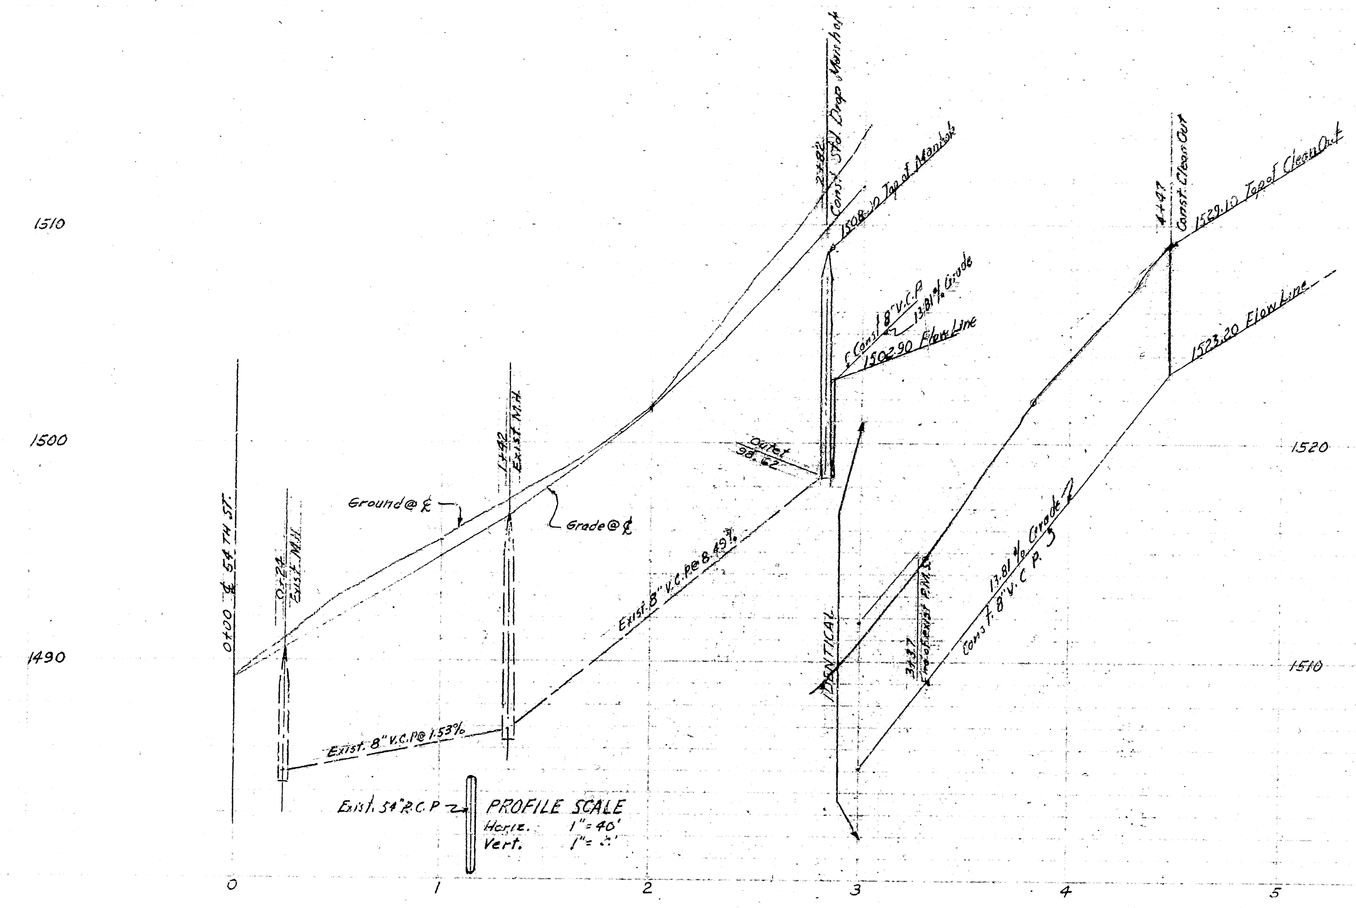

Bench Mark:
North end of conc. curb, west side @ Sepulveda and 54TH ST., City of San Bernardino. B.M. #36
Elev. 1488.34 M.S.L.

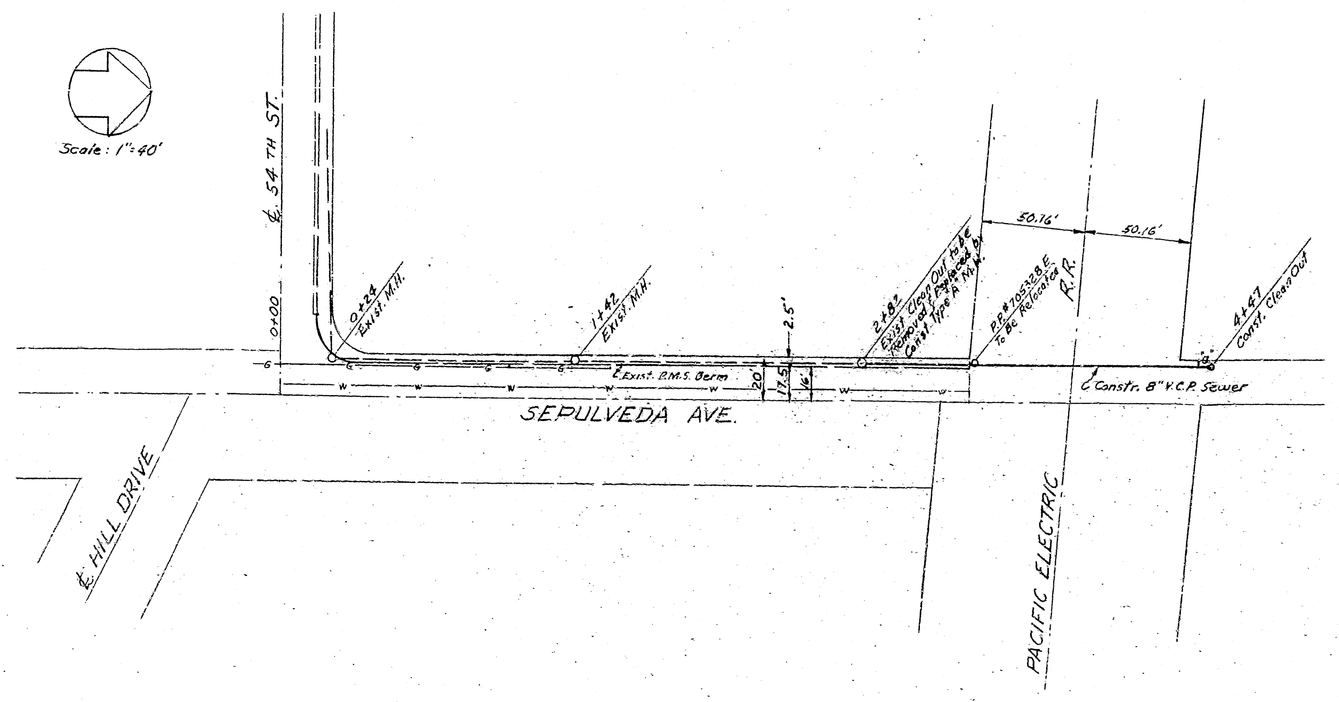

GENERAL NOTES

1. All work embodied on these Plans shall be done in conformity with applicable provisions of Standard Specifications No 2271 and Standard Drawing No 2321 on file in the Office of the City Engineer.
2. All house connection sewers shall be constructed on an upward grade of Two per cent from the Main.
3. 6"X 4" Wyes with 4" Vitrified Clay Pipe connecting Sewer to be constructed are shown on Plan thus: Y
4. All House connections are approximate and exact locations are to be determined in the Field.
5. Location of underground utilities as shown on these Plans are not to be assumed as being exact or complete and the City assumes no responsibility for errors or omissions in showing such locations. The Contractor should verify or ascertain the location of all underground utilities and he must assume all liability for damages caused by his operation.
6. Manhole tops to be constructed 6" below Finished Pavement Grade
7. Manhole steps shall not be required. Manhole frames and covers shall be Alhambra Foundry No. A-1190 (Silent Knight) or approved equal.
8. Sewer laterals shall be constructed of Fernco "Wedge Lock" "Speed Seal" "Band Seal" or Ceramic Weld" Vitrified Clay Pipe or Cast Iron or Asbestos Cement Pipe.

NOT CONSTRUCTED 1963

REFERENCE DRAWINGS

Improvement Drwgs - Tract No 6912 File No 70-240
DWG. No 3061 SH. 1 & 3

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARDINO

SEPULVEDA STREET SEWER IMPROVEMENT

From a point 282± Ft. north of 54TH Street to a point 487± Ft. north of 54TH Street.

SUBMITTED BY _____
APPROVED 1-6- 19 64
CITY ENGINEER
R.C.E. No 13653

REFERENCE
DRAWN BY B. Stone
CHECKED BY

DRAWING 320
SHEET OF SHEETS