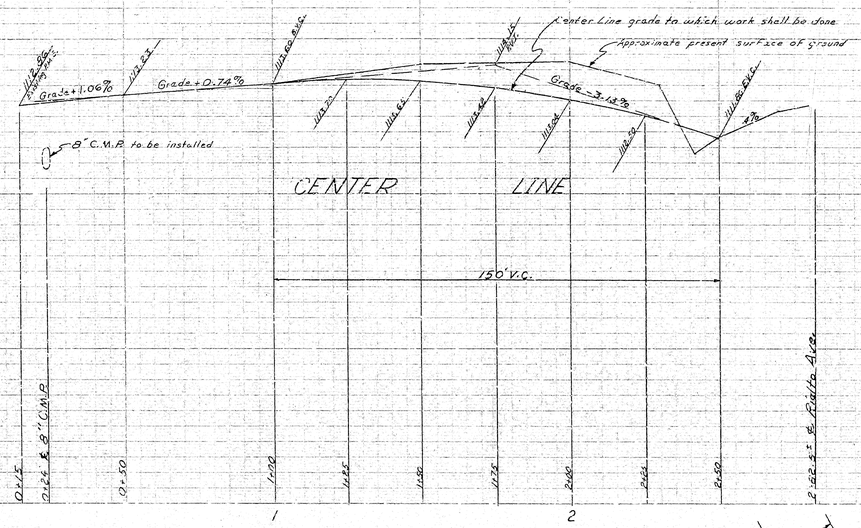

PROFILE
Scale: Hor. 1" = 20'
Vert. 1" = 2'

GENERAL NOTES

1. All work embodied on this plan shall be done in conformity with applicable provisions of Specifications No 2271.
2. Removal of Obstructions:
   (1) To be removed or relocated by others.
   (2) To be removed and relocated under this contract. (Footings on Street signs shall be Class "B" concrete same as original installation.
3. Install Metal Guide Post with W62R Reflector Units as shown thus ---- ⊕ 6ft.
4. Payment for all removals, earthwork and guttering shall be included in prices paid for other contract items of work and no additional compensation will be allowed therefor.

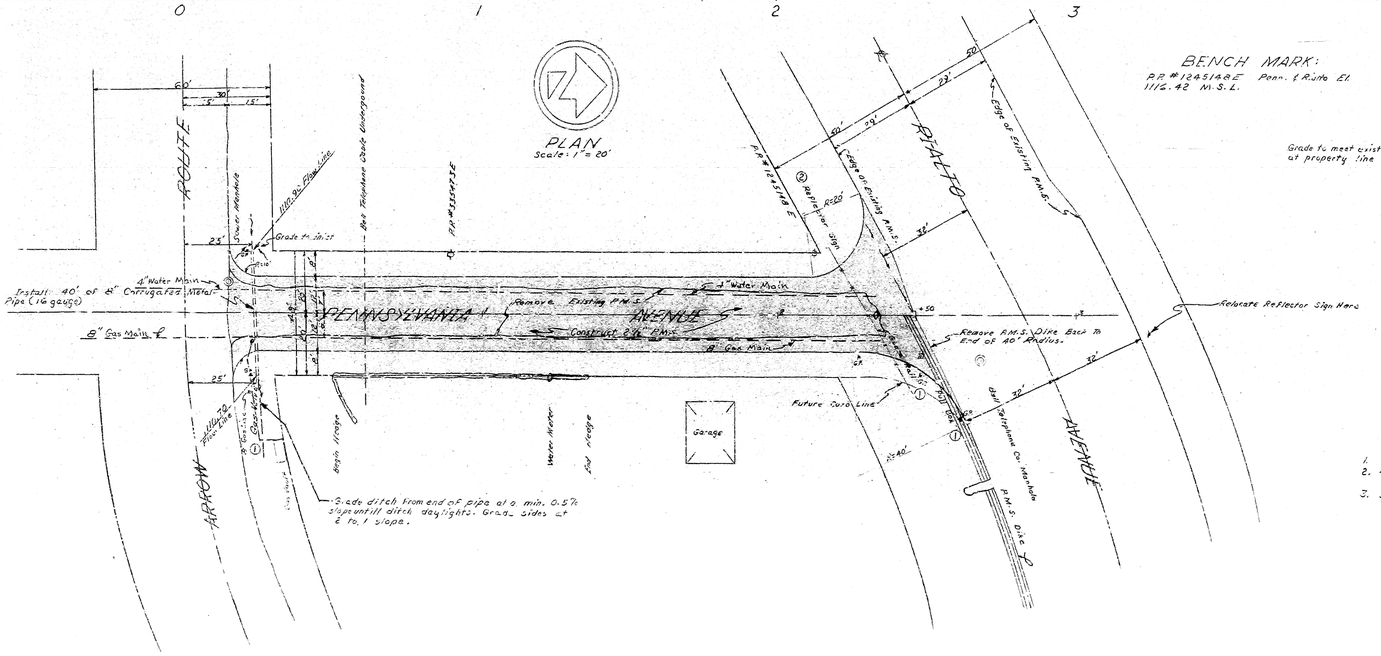

BENCH MARK:
P.R. #124514AE Penn. & Rialto El.
1116.42 M.S.L.

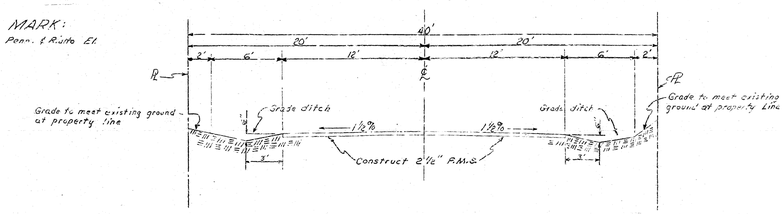

TYPICAL CROSS SECTION
Scale = 1" = 5'

QUANTITIES

1. 25 Tons plant-mixed surfacing.
2. 40 Linear feet 8" corrugated metal pipe (16 gauge).
3. 5 Metal guide post with W62R reflector units.

PENNSYLVANIA AVENUE
FROM
ARROW ROUTE TO RIALTO AVENUE
PAVING

Pennsylvania Ave. Arrow Route to Rialto Ave.