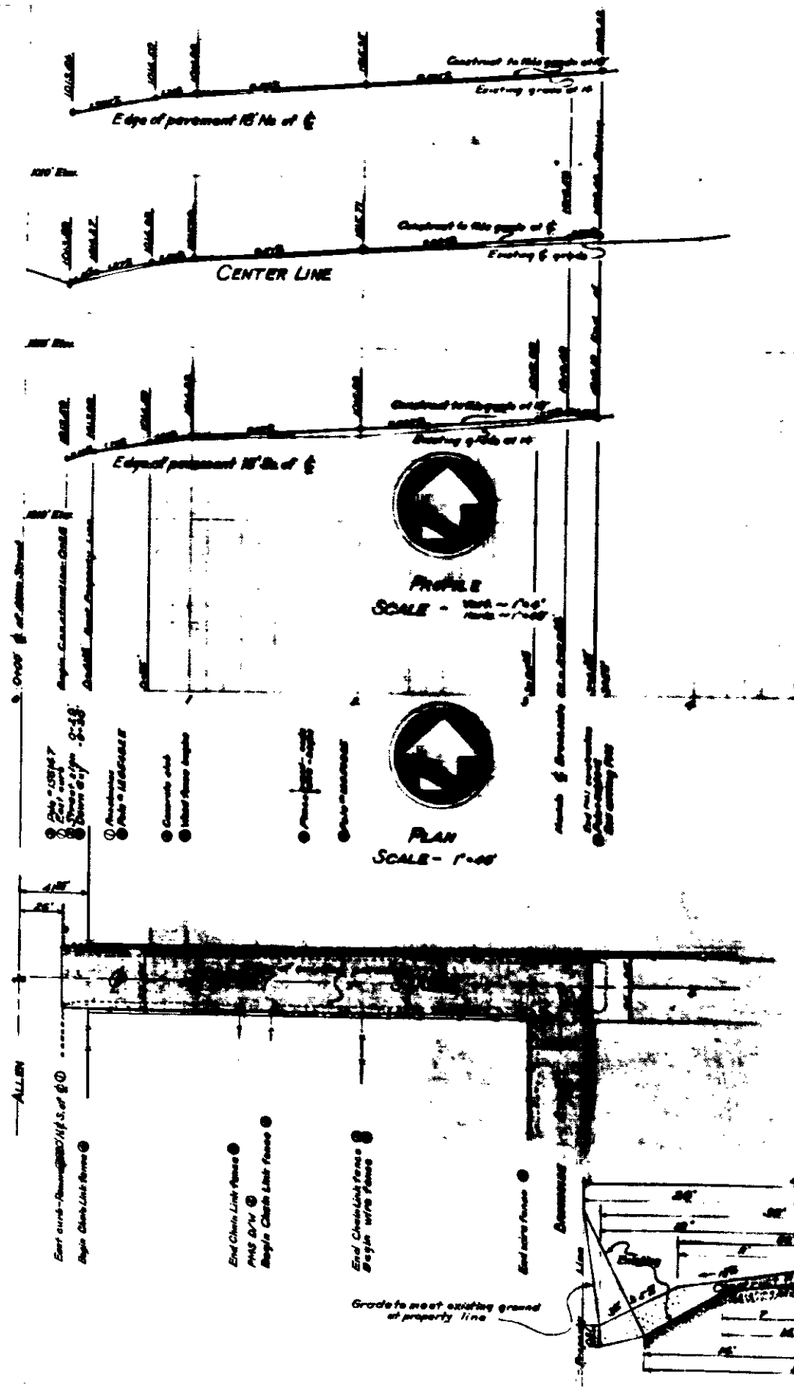

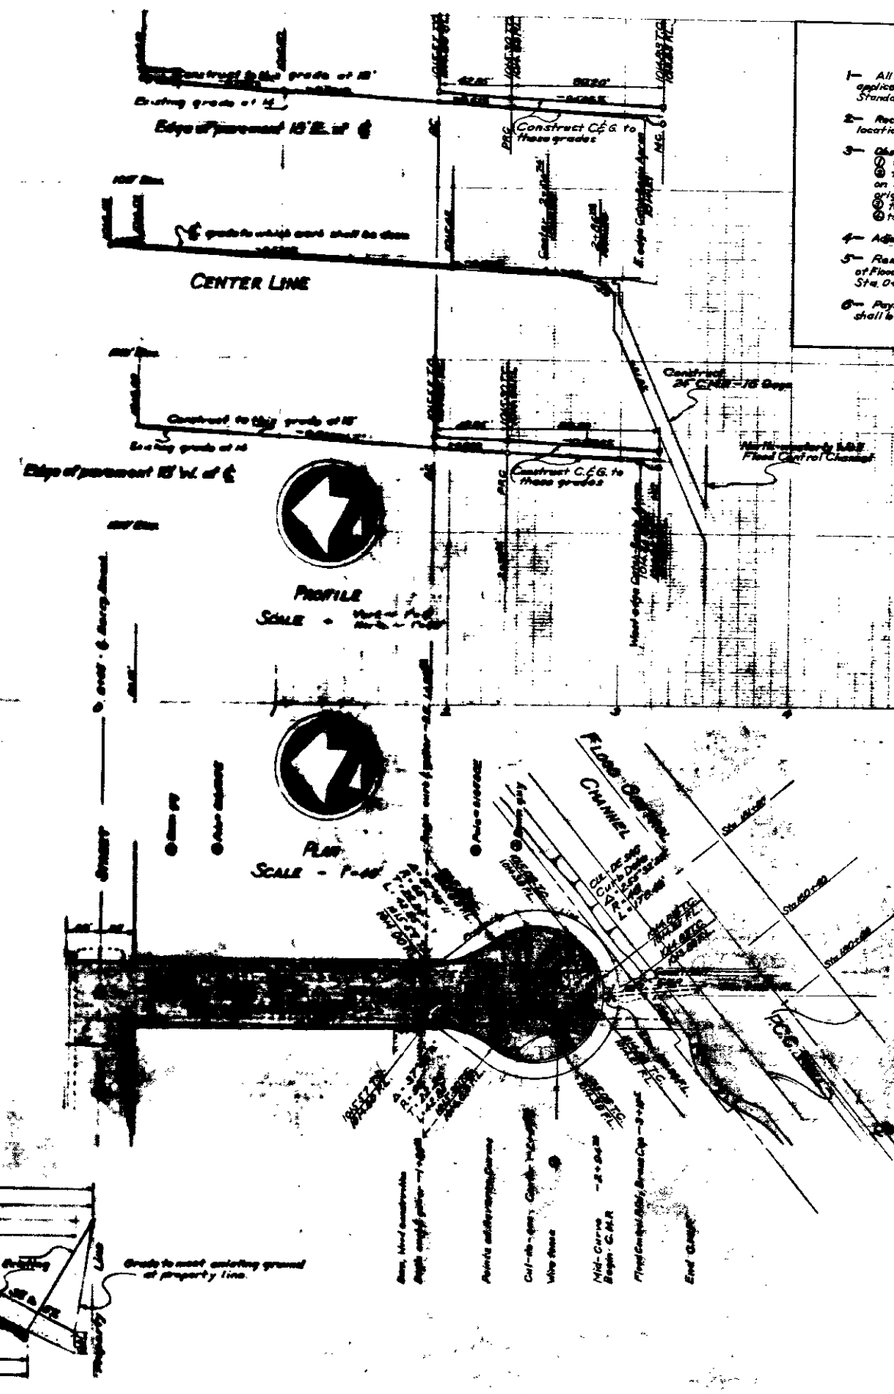

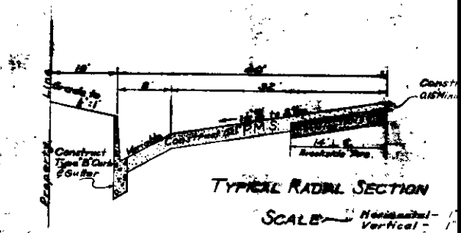

GENERAL NOTES

1— All work embodied on these plans shall be done in conformity with applicable provisions of Standard Specifications No. 2271 and Standard Drawings No. 2321 on file in the Office of the City Engineer.

2— Recess curbs for driveways where necessary. Exact location and width to be determined in the field.

3— Obstructions (markings on plans), as directed by Engineer—
- (1) to be removed under this contract.
- (2) to be removed and relocated under this contract (Footings on street signs shall be Class "B" Concrete, same as original installation.)
- (3) To be removed or relocated by others.
- (4) to be removed and deposited on adjacent property.

4— Adjust all sewer manholes to grade after completion of paving.

5— Remove existing pavement from Sta. 2+60' to North wall of Flood Control Channel on Brookside Street, and from Sta. 0+26' to Sta. 0+36' on Berry Street.

6— Payment for pavement removal, earthwork and watering shall be included in other items of work.

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARD
BERRY STREET & BROOKSIDE S
IMPROVEMENT — PAVING &
CUL-DE-SAC CONSTRUCTI