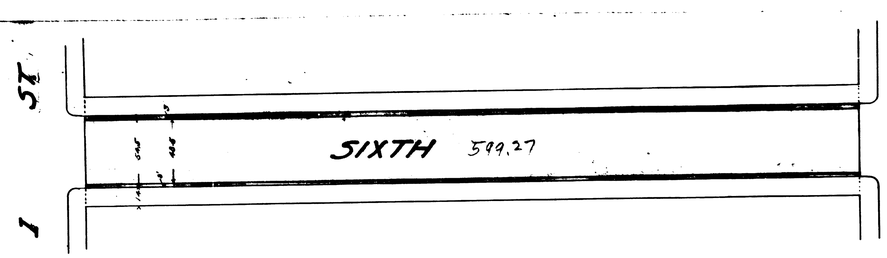

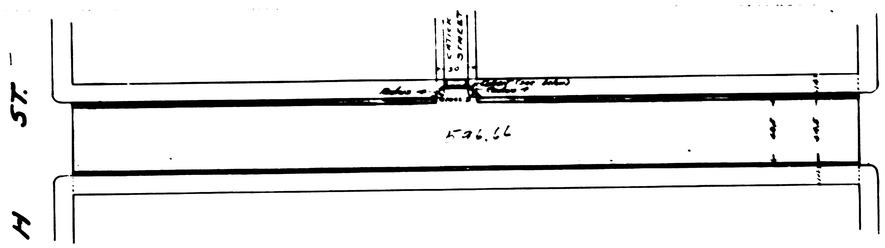

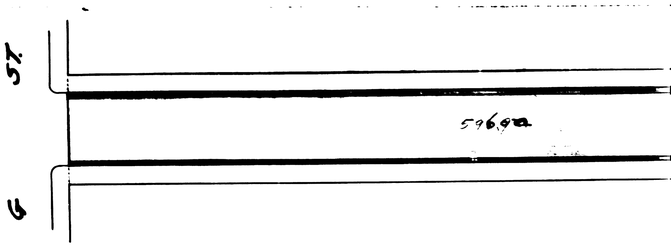

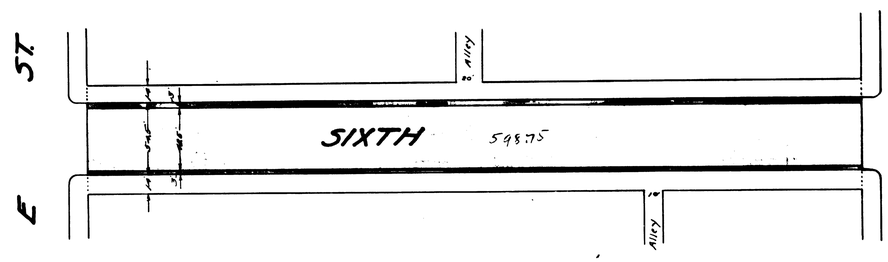

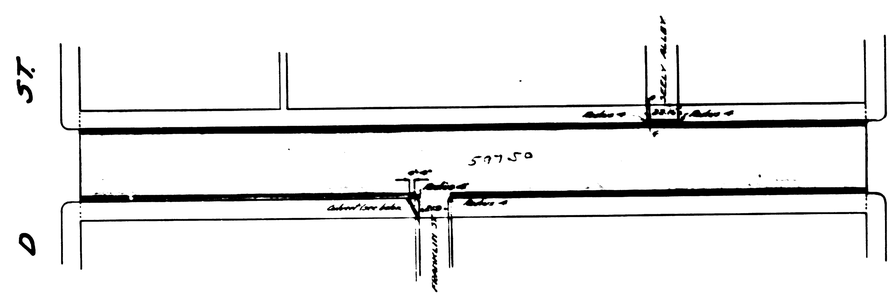

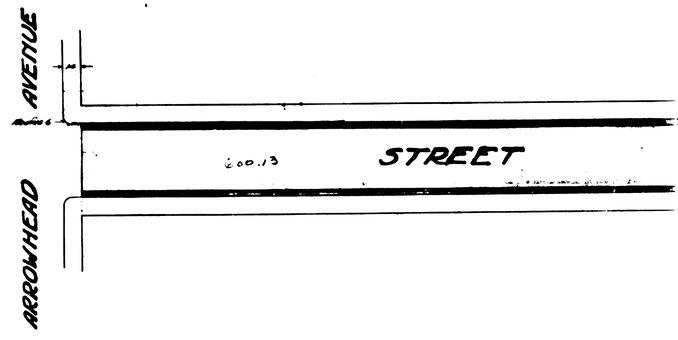

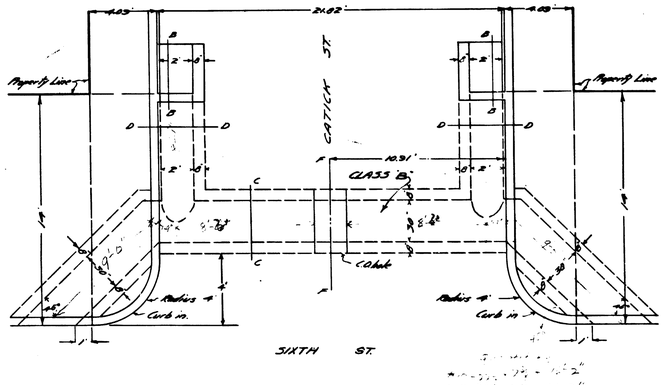

PLAN OF CULVERT AT SIXTH & CATICK STS.
Scale ¼"=1'

Note:-
All bends & junctions, north of culvert & for riveted together with a ⅝" rivet to each corrugation. Culvert openings in curb to have angle iron arches.
Corrugated iron culverts under roadway to be 14 1/2 Gauge and under sidewalk or parking, 16 16 Gauge. U.S. Standard iron

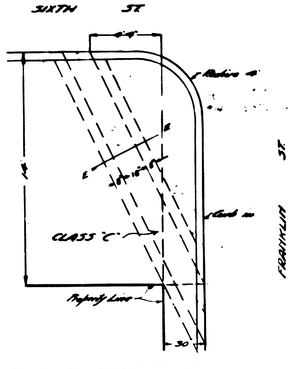

PLAN OF CULVERT AT FRANKLIN & SIXTH STS.
Scale ¼"=1'

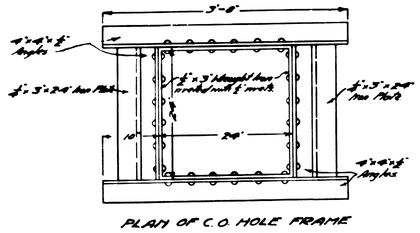

PLAN OF C.O. HOLE FRAME
Scale 1"=1'



SECTION ON FF SHOWING HOLE & C.O. HOLE FRAME
Scale 1"=1'

CROSS SECTION OF GUTTER ON BB
Scale ¼"=1'



C.O. HOLE COVER CAST IRON
Scale 1"=1'