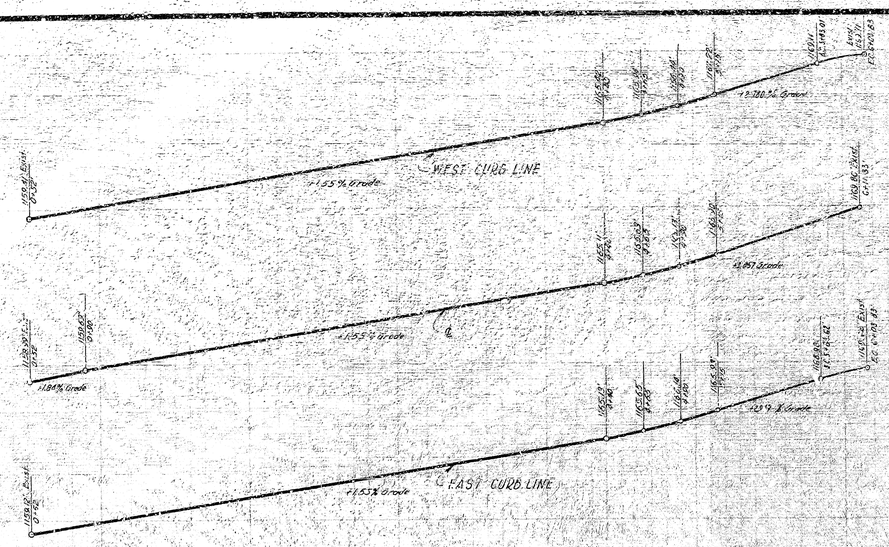

PROFILE
VALENCIA AVE.

Scale Horiz. 1" = 40'
Vert. 1" = 4'

BENCH MARK:
Elevation 1170.45 M.S.L. @ N.E. Corner of Highland Ave. & Valencia Ave.

GENERAL NOTES

1. All work embodied on these plans shall be done in conformity with applicable provisions of the City of San Bernardino, Department of Engineering Specifications No. 2771 and special provision No. 2512.
2. All trees interfering with construction will be removed by City forces.
3. The street between gutters will be graded to within 0.1' ± of subgrade by City forces. The Contractor shall fine grade and throughly compact the subgrade prior to placing P.M.S.
4. P.M.S. is to be placed in two courses; A leveling course and a surfacing course.
5. Payment for removing existing curb and gutter to be included in other items of work.
6. Payment for adjusting Manhole to grade to be included in other items of work.

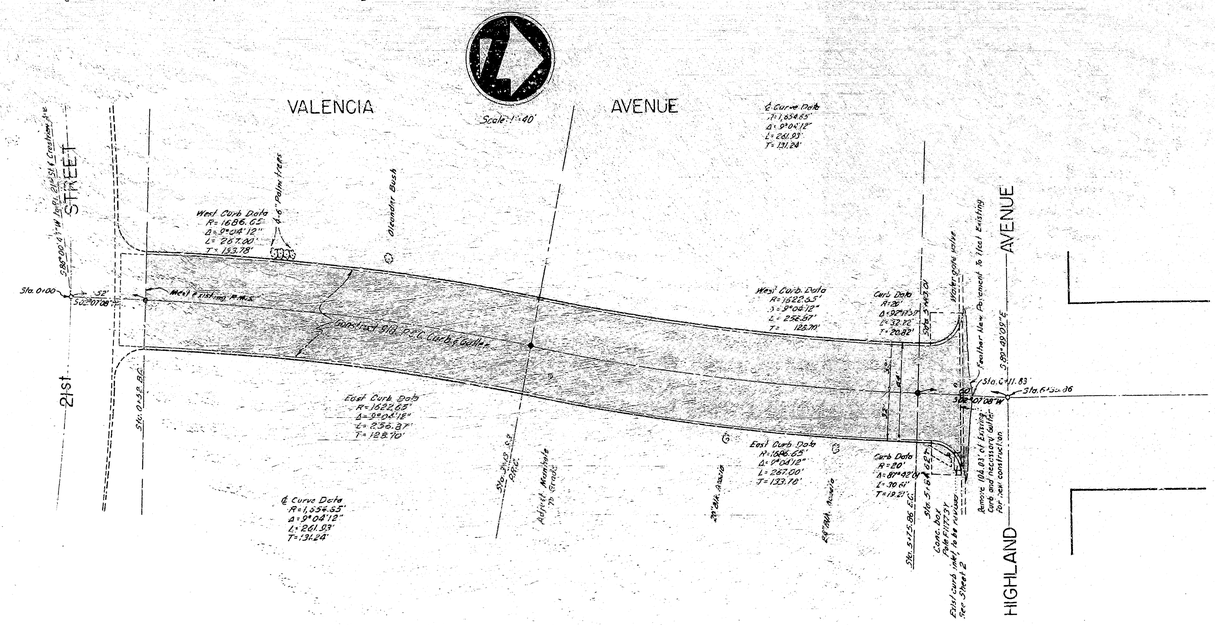

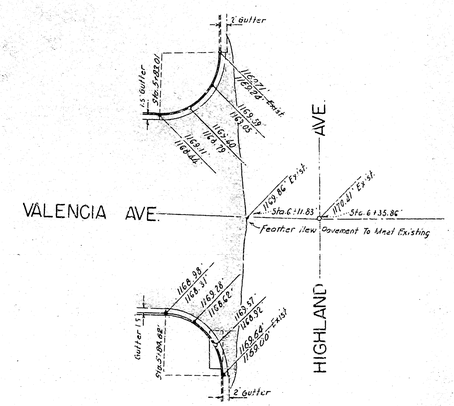

INTERSECTION DETAIL

Scale: 1" = 20'

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARDINO
VALENCIA AVENUE
21st STREET to HIGHLAND AVE.
Curb, Gutter, and Paving

SUBMITTED BY
APPROVED MAY 17, 57
Ronald C. Wright
CITY ENGINEER
REGISTERED CIVIL ENGINEER 7679
d/c. 2513

71/231

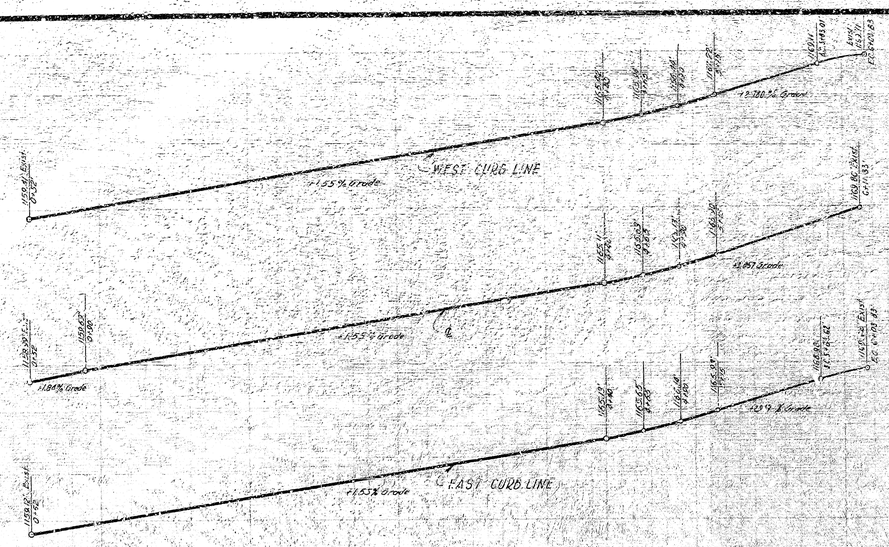

PROFILE
VALENCIA AVE.

Scale Horiz. 1" = 40'
Vert. 1" = 4'

BENCH MARK:
Elevation 1170.45 M.S.L. @ N.E. Corner of Highland Ave. & Valencia Ave.

GENERAL NOTES

1. All work embodied on these plans shall be done in conformity with applicable provisions of the City of San Bernardino, Department of Engineering Specifications No. 2771 and special provision No. 2512.
2. All trees interfering with construction will be removed by City forces.
3. The street between gutters will be graded to within 0.1' ± of subgrade by City forces. The Contractor shall fine grade and throughly compact the subgrade prior to placing P.M.S.
4. P.M.S. is to be placed in two courses; A leveling course and a surfacing course.
5. Payment for removing existing curb and gutter to be included in other items of work.
6. Payment for adjusting Manhole to grade to be included in other items of work.

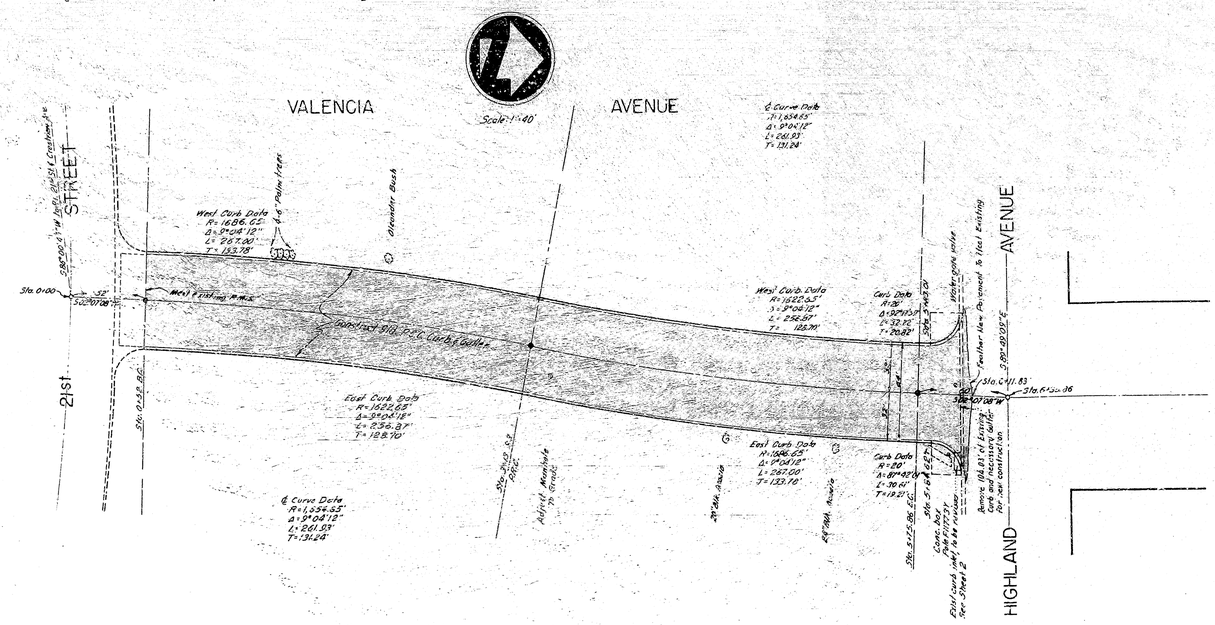

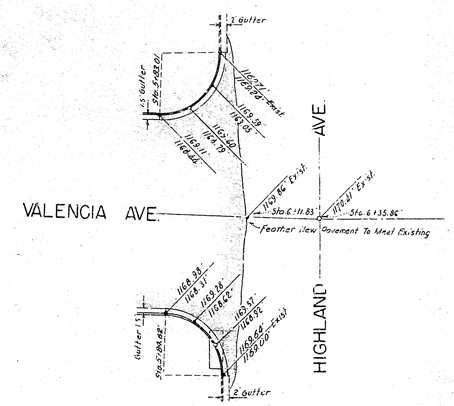

INTERSECTION DETAIL

Scale: 1" = 20'

DEPARTMENT OF ENGINEERING
CITY OF SAN BERNARDINO
VALENCIA AVENUE
21st STREET to HIGHLAND AVE.
Curb, Gutter, and Paving

SUBMITTED BY
APPROVED MAY 17, 57
Ronald C. Wright
CITY ENGINEER
REGISTERED CIVIL ENGINEER 7679
d/c. 2513

71/231