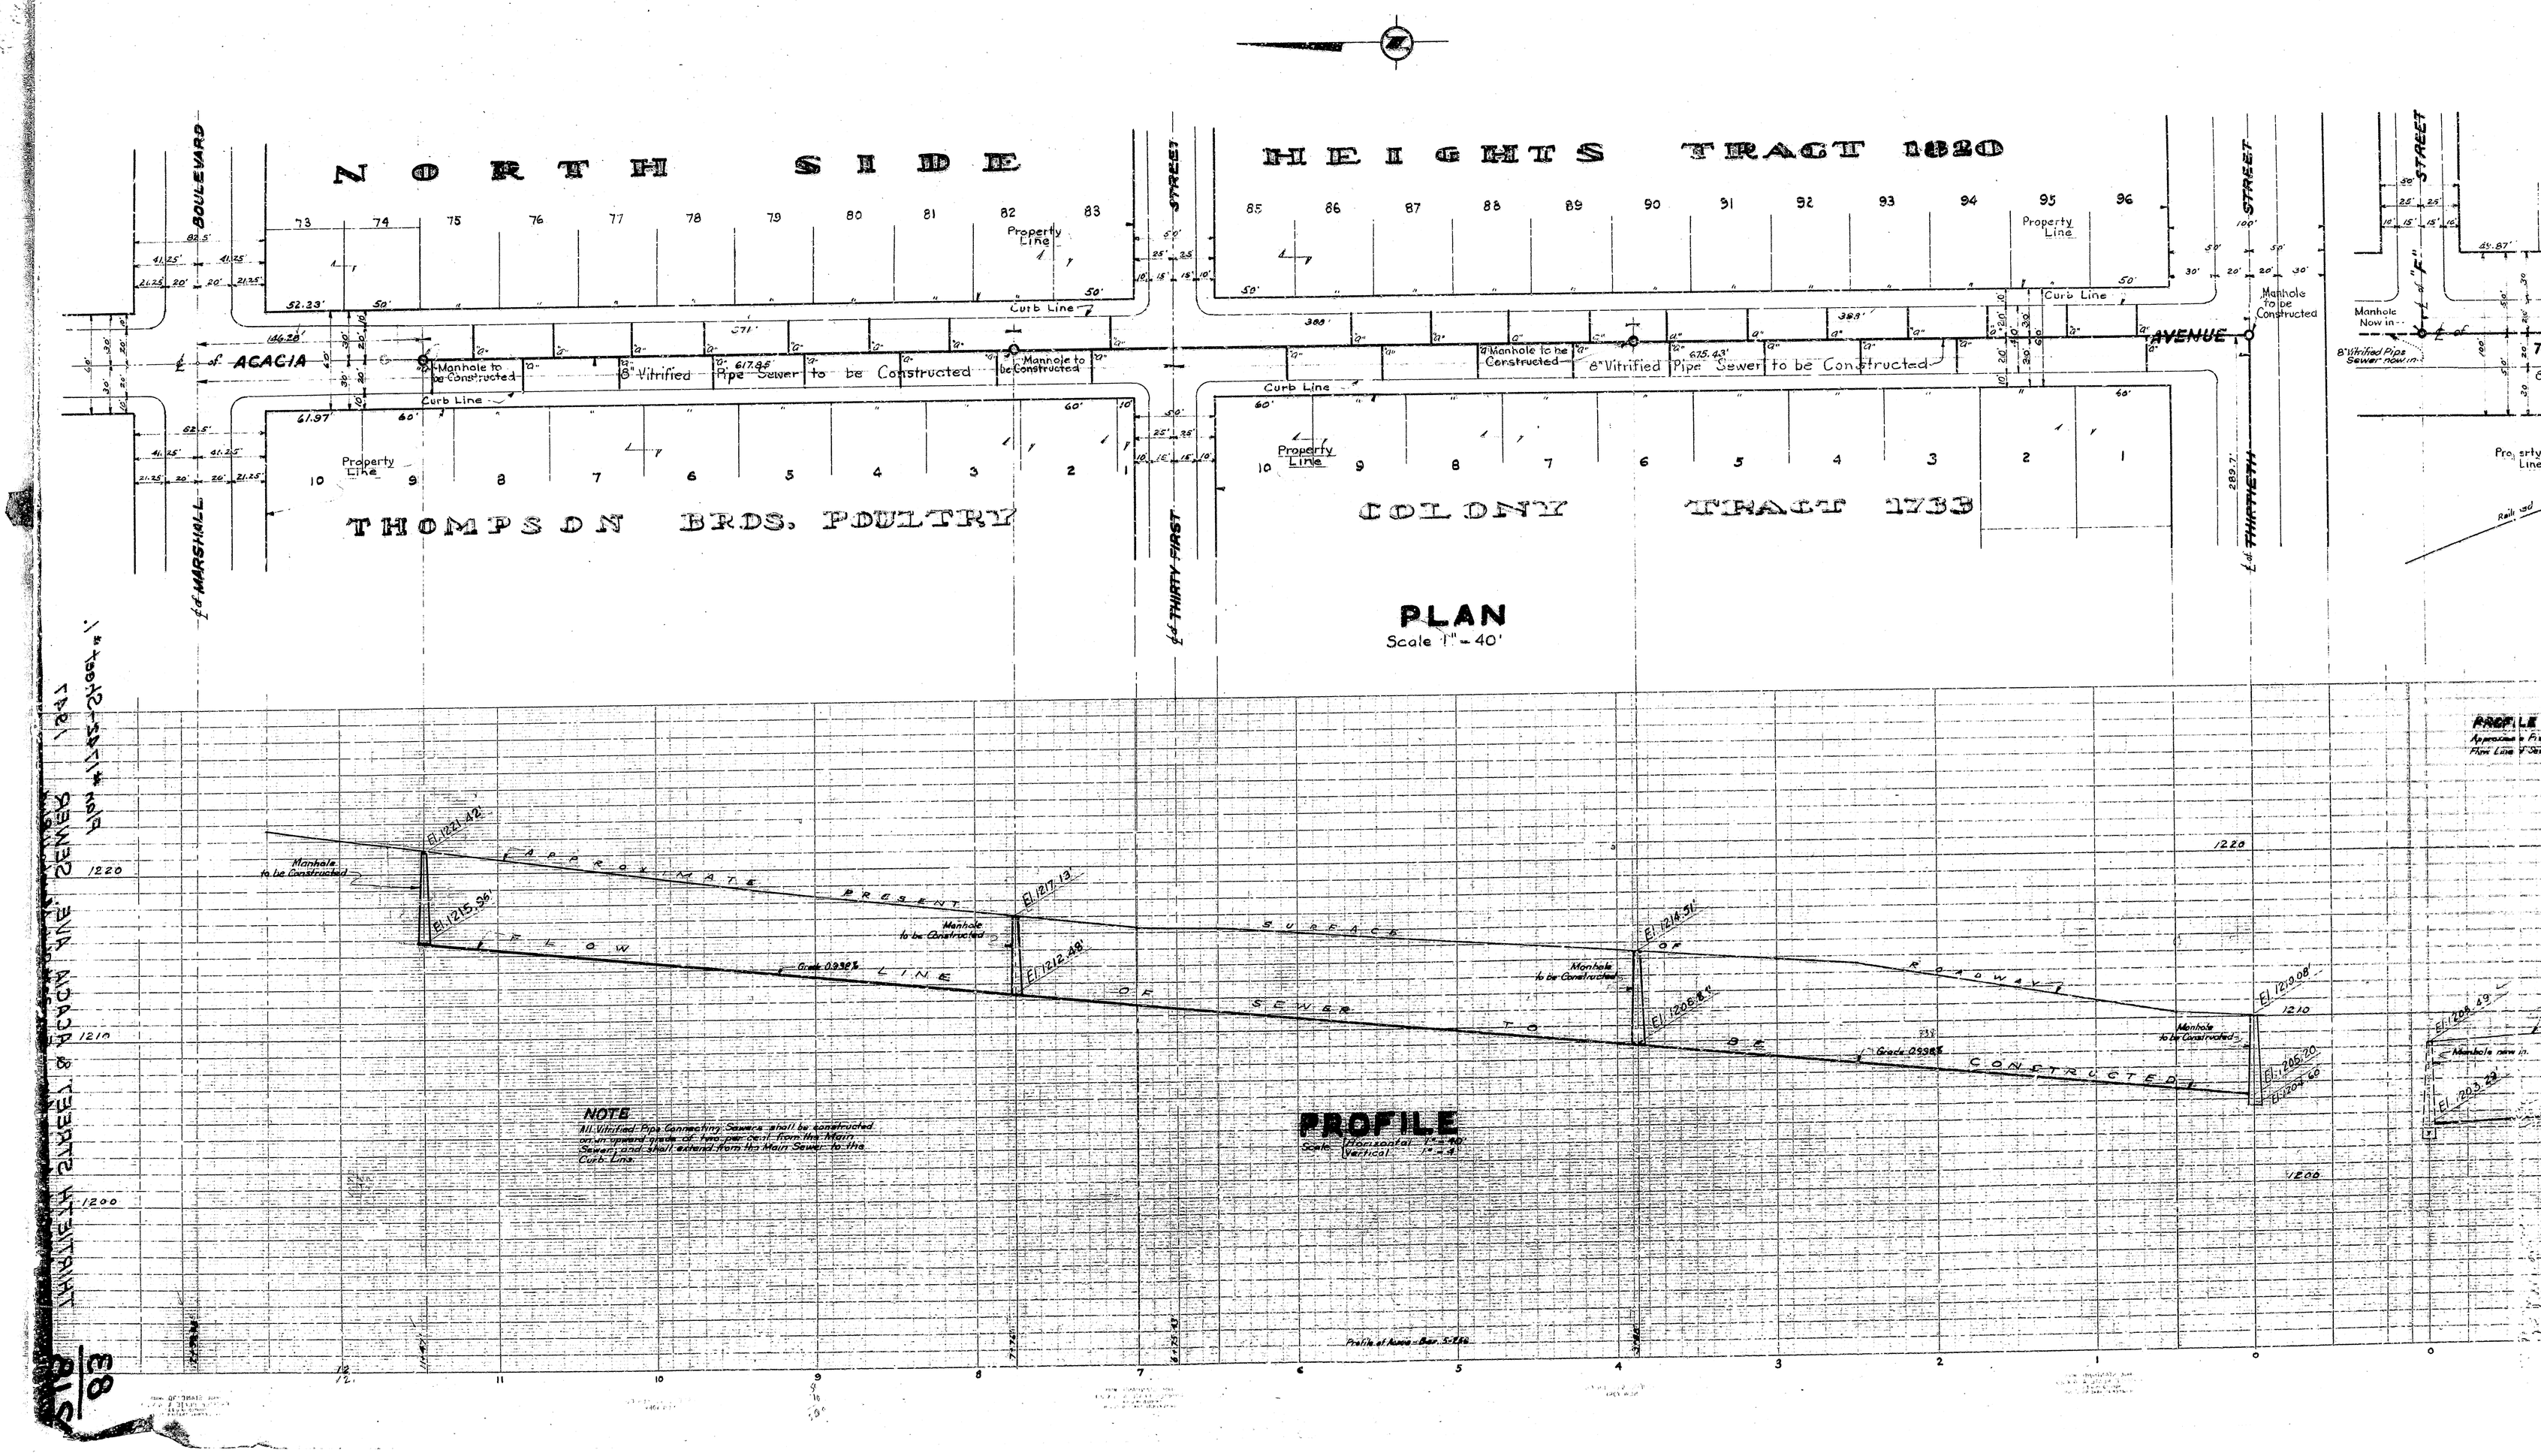
NORTH SIDE HEIGHTS TRACT 1820
THOMPSON BROS. POULTRY COLONY TRACT 1733
BOULEVARD
MARSHALL
THIRTY FIRST STREET
THIRTIETH STREET
ACACIA AVENUE
Property Line
Curb Line
Manhole to be Constructed
8" Vitrified Pipe Sewer to be Constructed
Manhole Now in
8" Vitrified Pipe Sewer now in
PLAN
Scale 1" = 40'
PROFILE
Scale Horizontal 1" = 40' Vertical 1" = 4'
APPROXIMATE PRESENT SURFACE OF ROADWAY
FLOW LINE OF SEWER TO BE CONSTRUCTED
Manhole to be Constructed
Grade 0.938%
El. 1221.42
El. 1215.96
El. 1217.13
El. 1212.48
El. 1214.51
El. 1206.8
El. 1210.08
El. 1205.20
El. 1204.60
El. 1203.29
NOTE
All Vitrified Pipe Connecting Sewers shall be constructed on an upward grade of two per cent from the Main Sewer and shall extend from the Main Sewer to the Curb Line.
Profile of Acacia - Bar 5-2.50
THIRTIETH STREET & ACACIA AVE. SEWER
Plan #1142-2-1 Sheet #1
1220
1210
1200

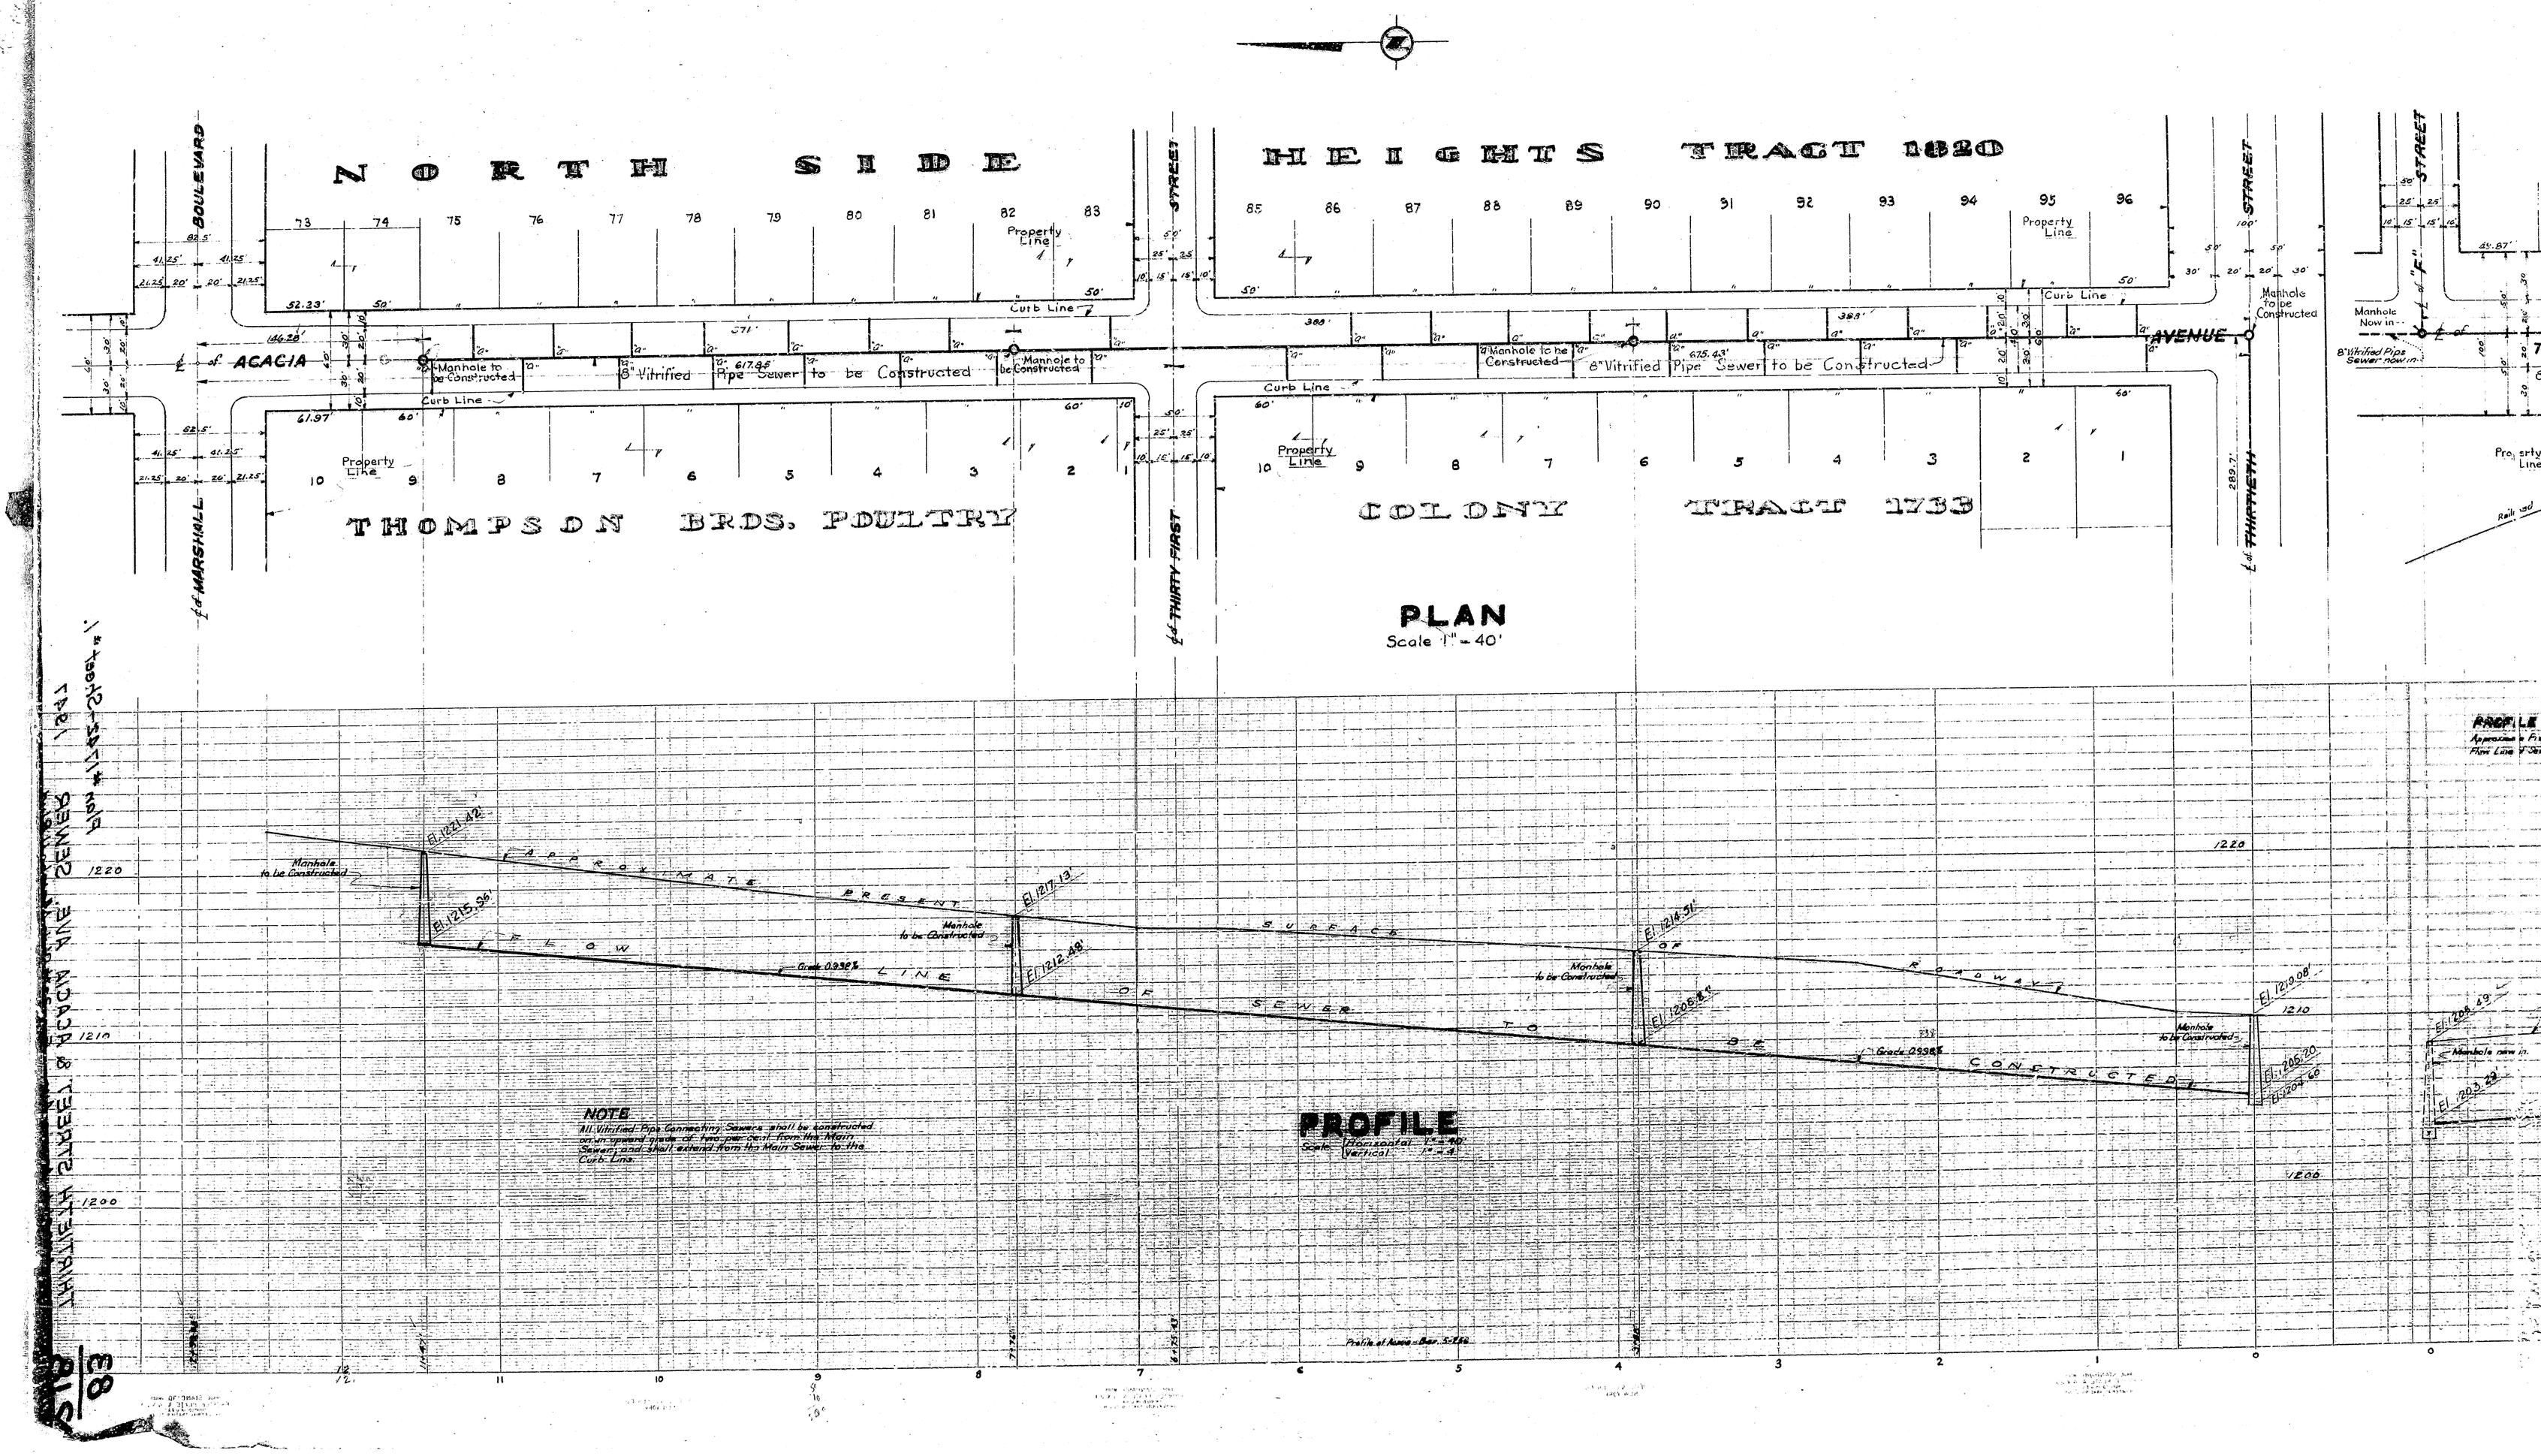
NORTH SIDE HEIGHTS TRACT 1820
THOMPSON BROS. POULTRY COLONY TRACT 1733
BOULEVARD
MARSHALL
ACACIA
THIRTY FIRST STREET
THIRTIETH STREET
AVENUE
Property Line
Curb Line
Manhole to be Constructed
8" Vitrified Pipe Sewer to be Constructed
Manhole Now in
8" Vitrified Pipe Sewer now in
PLAN
Scale 1" = 40'
PROFILE
Scale Horizontal 1" = 40' Vertical 1" = 4'
APPROXIMATE PRESENT SURFACE OF ROADWAY
FLOW LINE OF SEWER TO BE CONSTRUCTED
Manhole to be Constructed
Grade 0.938%
El. 1221.42
El. 1215.96
El. 1217.13
El. 1212.48
El. 1214.51
El. 1206.8
El. 1210.08
El. 1205.20
El. 1204.60
El. 1203.29
NOTE
All Vitrified Pipe Connecting Sewers shall be constructed on an upward grade of two per cent from the Main Sewer and shall extend from the Main Sewer to the Curb Line.
Profile of Acacia - Bar. 5-2.50
THIRTIETH STREET & ACACIA AVE. SEWER
Plan #1142-2-1 Sheet #1
1220
1210
1200